REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

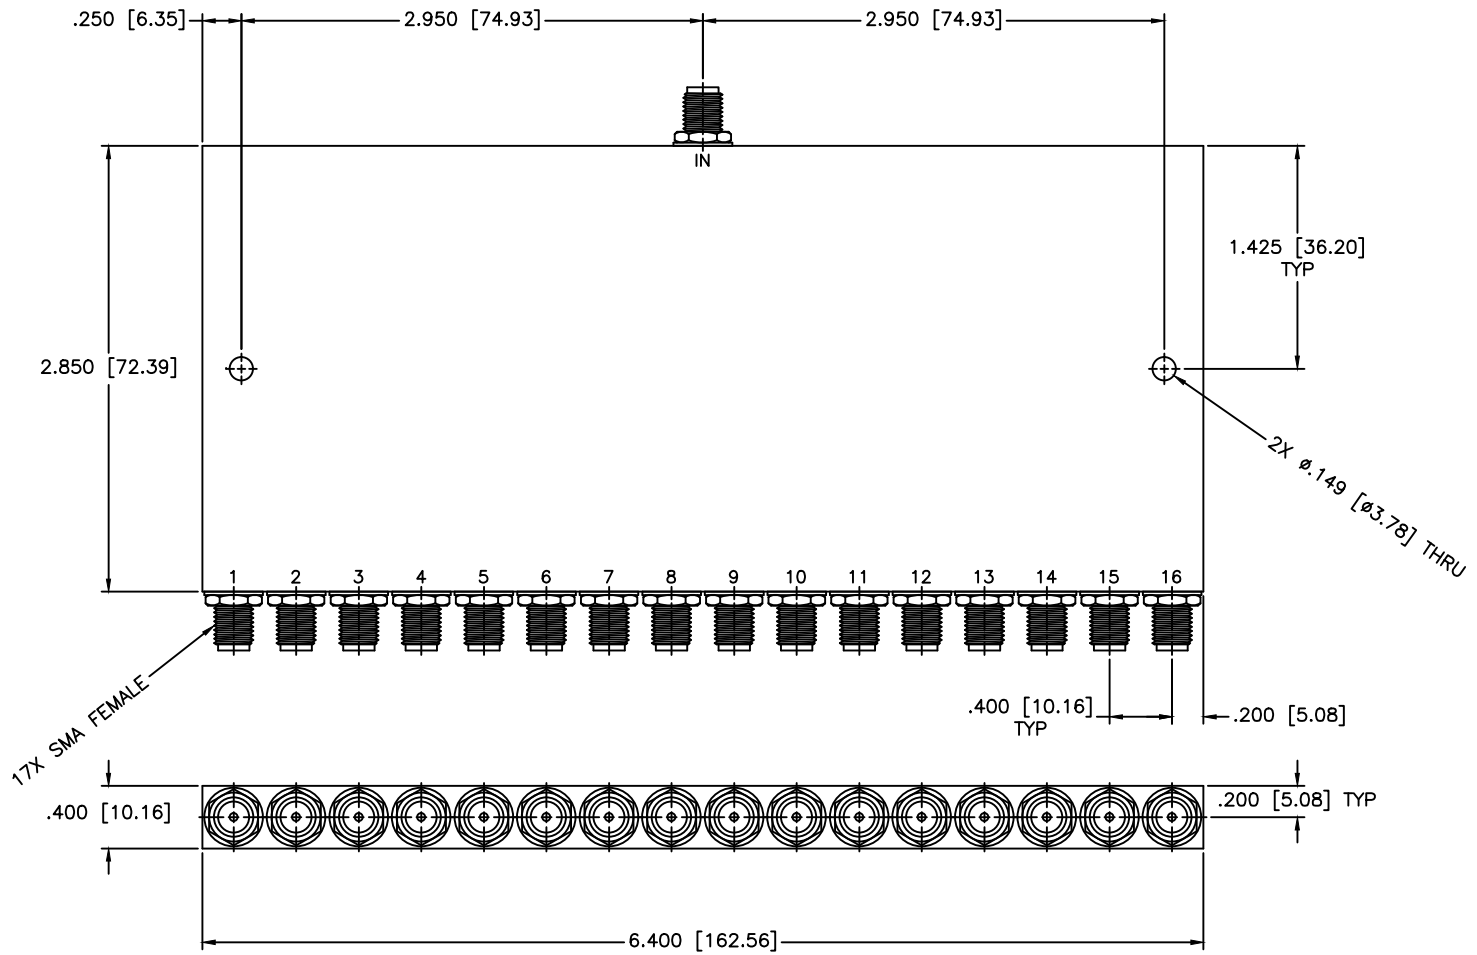

SPECIFICATIONS

FREQUENCY RANGE: 200–2000 MHz
INSERTION LOSS: 8.0dB Max.
VSWR: 1.80:1 Max.
ISOLATION: 16dB Min.
AMPLITUDE BALANCE: ±0.8dB Max.
PHASE BALANCE: ±12 Deg. Max.
INPUT POWER: 1 Watt

MATERIAL:

DRAWN: Paiboon — DATE: 07-25-2018

APPROVED: T. Nguyen — DATE: 07-25-2018

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.007
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

MCLI
MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

DRAWING TITLE: 16-WAY POWER DIVIDER

PART NO.: PL16-14

CAGE CODE: 0D2L5
SIZE: A
REV: N/A
DWG NO.: 86751

DO NOT SCALE THE DRAWING