


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

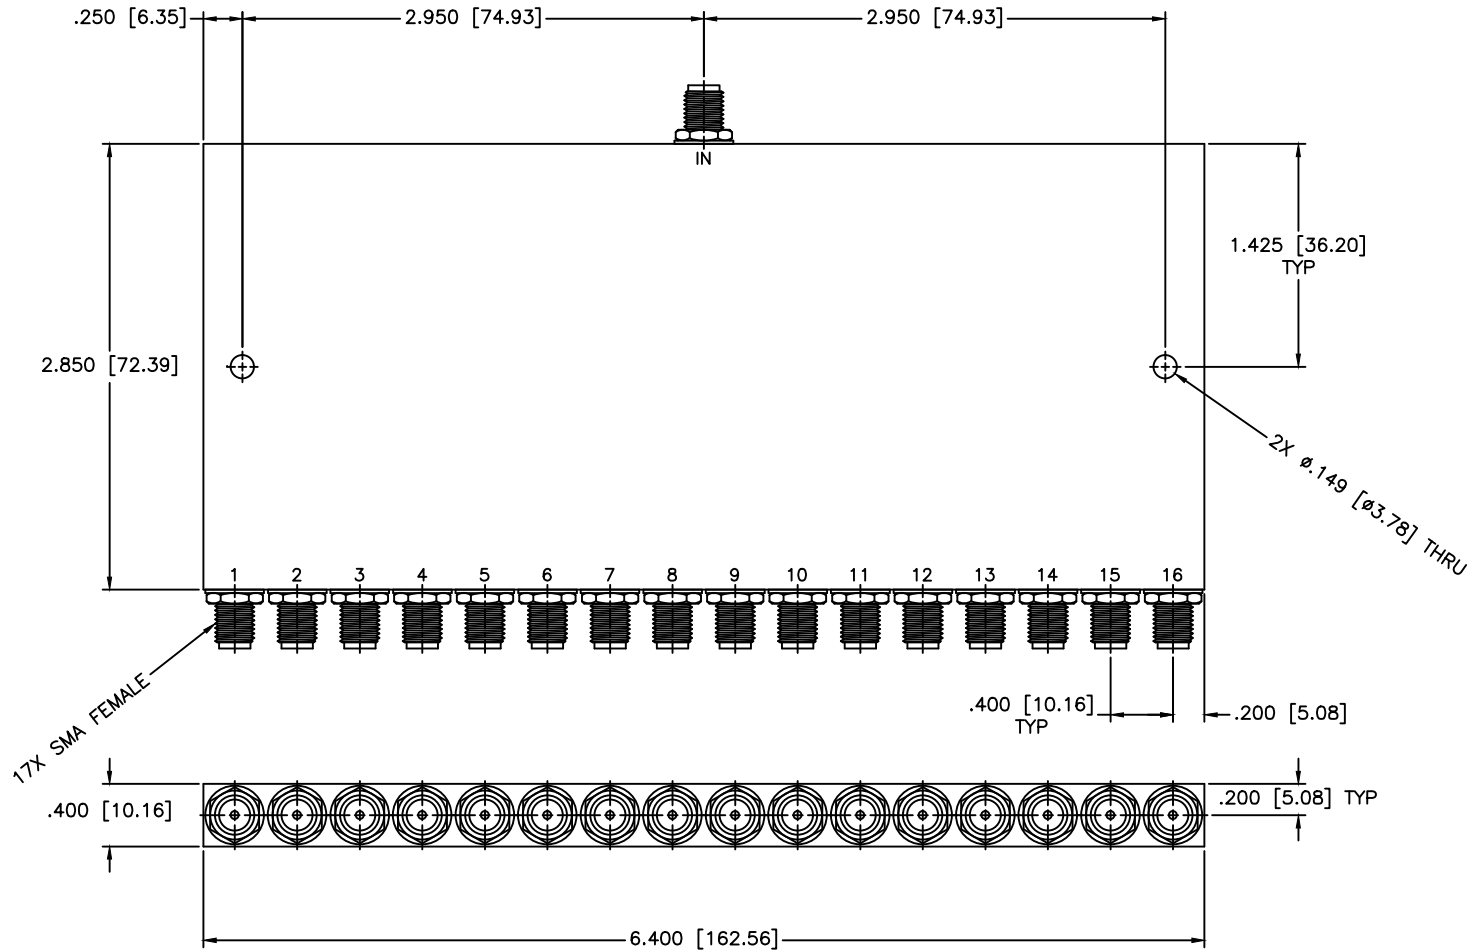

**SPECIFICATIONS**

FREQUENCY RANGE: 1-200 MHz  
 INSERTION LOSS: 1.4dB Max.  
 VSWR: 1.40:1 Max.  
 ISOLATION: 20dB Min.  
 AMPLITUDE BALANCE: ±0.5dB Max.  
 PHASE BALANCE: ±8 Deg. Max.  
 INPUT POWER: 1 Watt

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>		SCALE:	N/A
DRAWN: Paiboon Luekhamhan				DATE: 09-24-2007	SHEET:
APPROVED: T. Nguyen		DATE: 09-24-2007	DRAWING TITLE: <b>16-WAY POWER DIVIDER</b>		
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		PART NO.: <b>PL16-2</b>			
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	SIZE:	REV:	DWG NO.:
THIRD ANGLE PROJECTION 		OD2L5	A	N/A	82947
DO NOT SCALE THE DRAWING					