


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

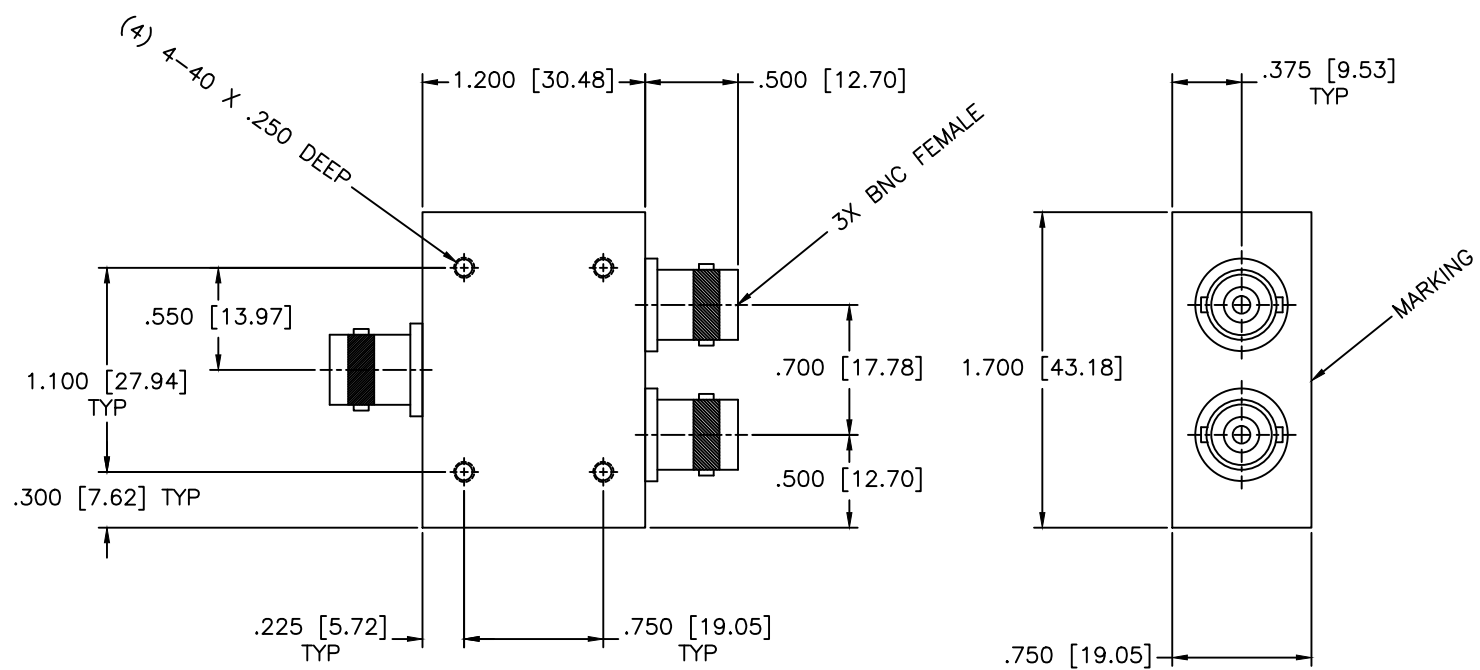

SPECIFICATIONS

FREQUENCY RANGE: 0.5–100 MHz
 INSERTION LOSS: 0.5dB Max.
 VSWR: 1.30:1 Max.
 ISOLATION: 28dB Min.
 PHASE BALANCE: ±1 Deg. Max.
 AMPLITUDE BALANCE: ±0.2dB Max.
 IMPEDANCE: 50 Ohms
 OPERATING TEMPERATURE: -40°C to +85°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:		
		2-WAY POWER DIVIDER		
DRAWN:		PART NO.		
Paiboon Luekhamhan		PL2-2-S/BF		
DATE:	09-04-2001	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE:
APPROVED:	T. Nguyen		09-04-2001	OD2L5
		THIRD ANGLE PROJECTION 	REV:	N/A
			DO NOT SCALE THE DRAWING	
			DWG NO. 81932	