


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

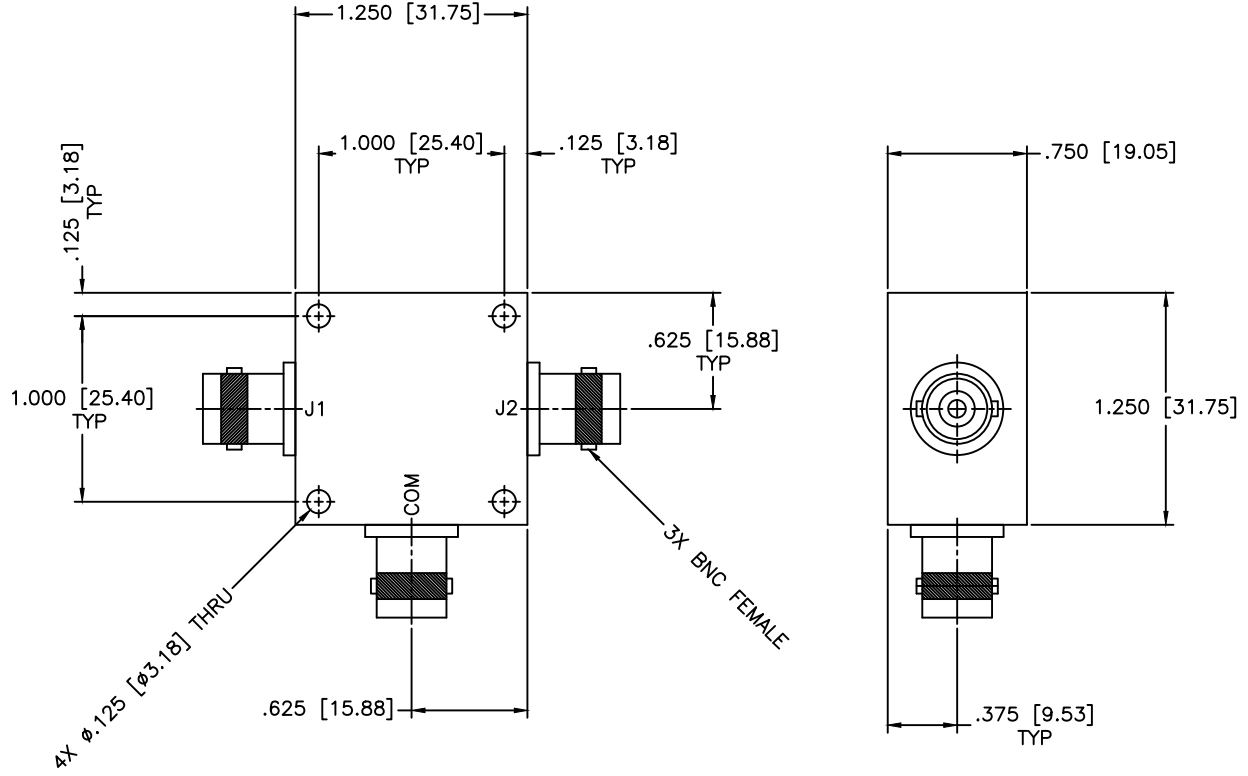

SPECIFICATIONS

Frequency Range: 1–500 MHz
 Isolation: 20dB Min.
 VSWR: 1.30:1 Max.
 Insertion Loss: 1.0dB Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±3 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE:		2-WAY POWER DIVIDER			
PART NO.:		PL2-23/BF			
DRAWN: Paiboon Luekhamhan	DATE: 08-02-2007	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 08-02-2007		THIRD ANGLE PROJECTION 	OD2L5	DO NOT SCALE THE DRAWING
					DWG NO. 82884