


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

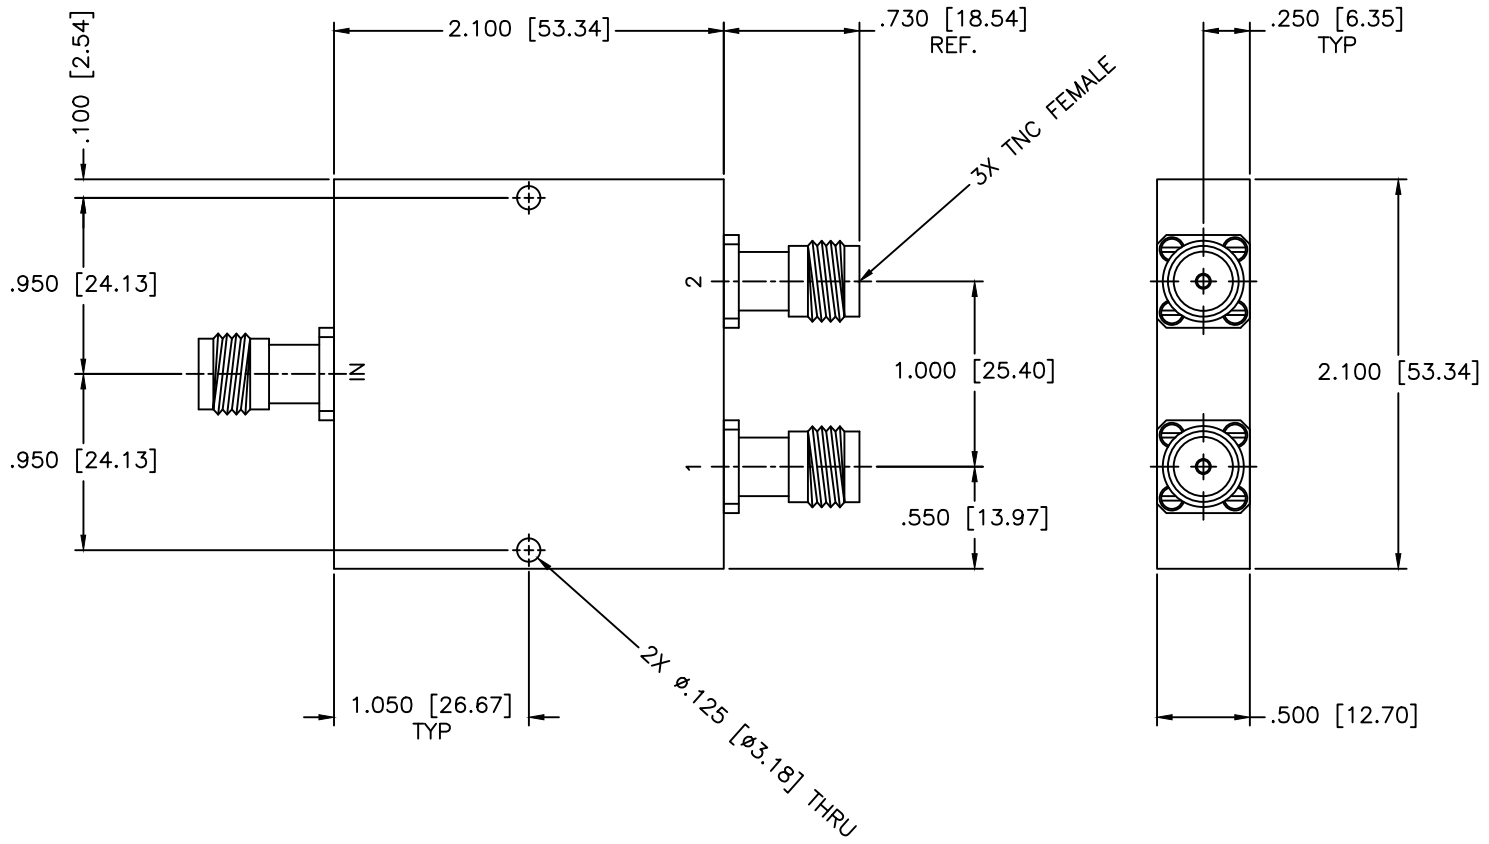

SPECIFICATIONS

FREQUENCY RANGE: 0.25–0.50 MHz
 INSERTION LOSS: 0.2dB Max.
 VSWR: 1.20:1 Max.
 ISOLATION: 22dB Min.
 PHASE BALANCE: ±2 Deg. Max.
 AMPLITUDE BALANCE: ±0.2dB Max.
 POWER RATING: 30 Watts
 OPERATING TEMPERATURE: -40°C to +85°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 11-27-2007
APPROVED: T. Nguyen	DATE: 11-27-2007

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: 2-WAY POWER DIVIDER			
PART NO. PL2-24/TNC			
CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO. 83000
DO NOT SCALE THE DRAWING			

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION