


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

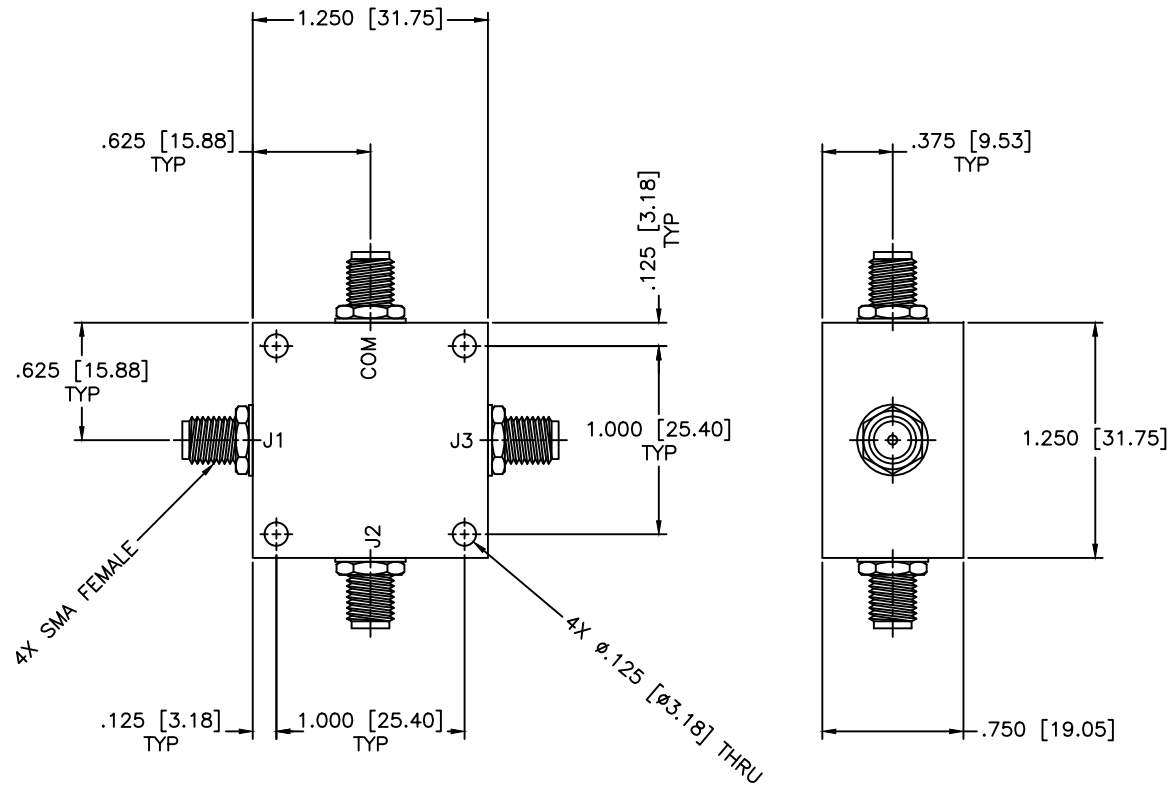

**SPECIFICATIONS**

Frequency Range: 1000–2000 MHz  
 Insertion Loss: 2.2dB Max.  
 Isolation: 18dB Min.  
 VSWR: 1.60:1 Max.  
 Amplitude Balance: ±0.5dB Max.  
 Phase Balance: ±8 Deg. Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-22-1997
APPROVED: T. Nguyen	DATE: 10-22-1997

**MCLI** MICROWAVE COMMUNICATIONS LABORATORIES INC.  
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710  
 TEL: (727) 344-6254 FAX: (727) 381-6116  
 http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:  
 TOLERANCES  
 IN (INCHES) OR [mm] (MILLIMETERS)  
 FRACTIONS: ± 1/64  
 DECIMALS: ±.01 ±.005  
 ANGLE: ±1/2°

PROPRIETARY NOTICE:  
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY  
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN  
 PERMISSION FROM MICROWAVE COMMUNICATIONS  
 LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

SCALE:	N/A		
SHEET:	N/A		
DRAWING TITLE:	3-WAY POWER DIVIDER		
PART NO.:	PL3-11		
CAGE CODE:	SIZE:	REV:	DWG. NO.:
OD2L5	A	N/A	80143
DO NOT SCALE THE DRAWING			