


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

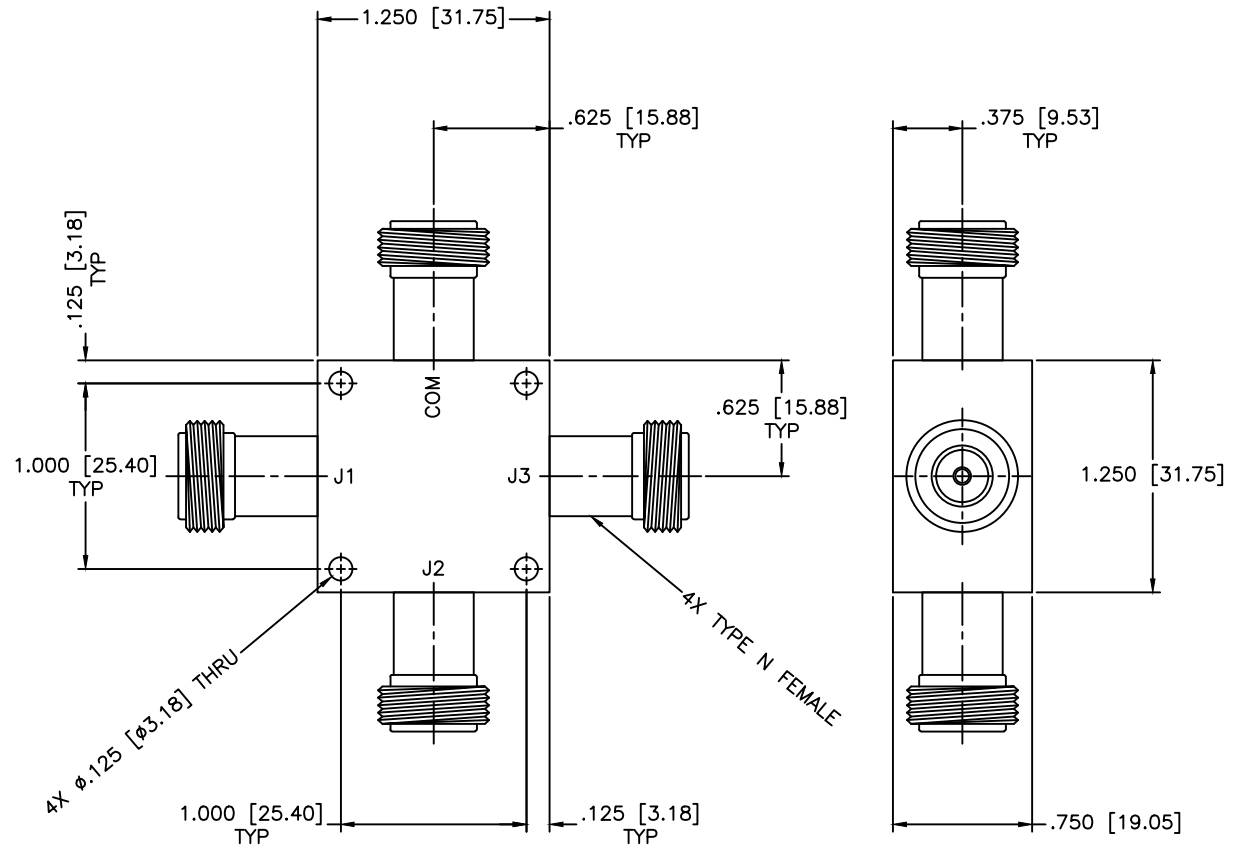

SPECIFICATIONS

Frequency Range: 1000–2000 MHz
 Isolation: 18dB Min.
 VSWR: 1.50:1 Max.
 Insertion Loss: 2.2dB Max.
 Amplitude Balance: ±0.5dB Max.
 Phase Balance: ±5 Deg. Max.

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 3-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 10-23-1997	PART NO. PL3-11/NF	
APPROVED: T. Nguyen		DATE: 10-23-1997	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 80154
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DO NOT SCALE THE DRAWING	

