


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

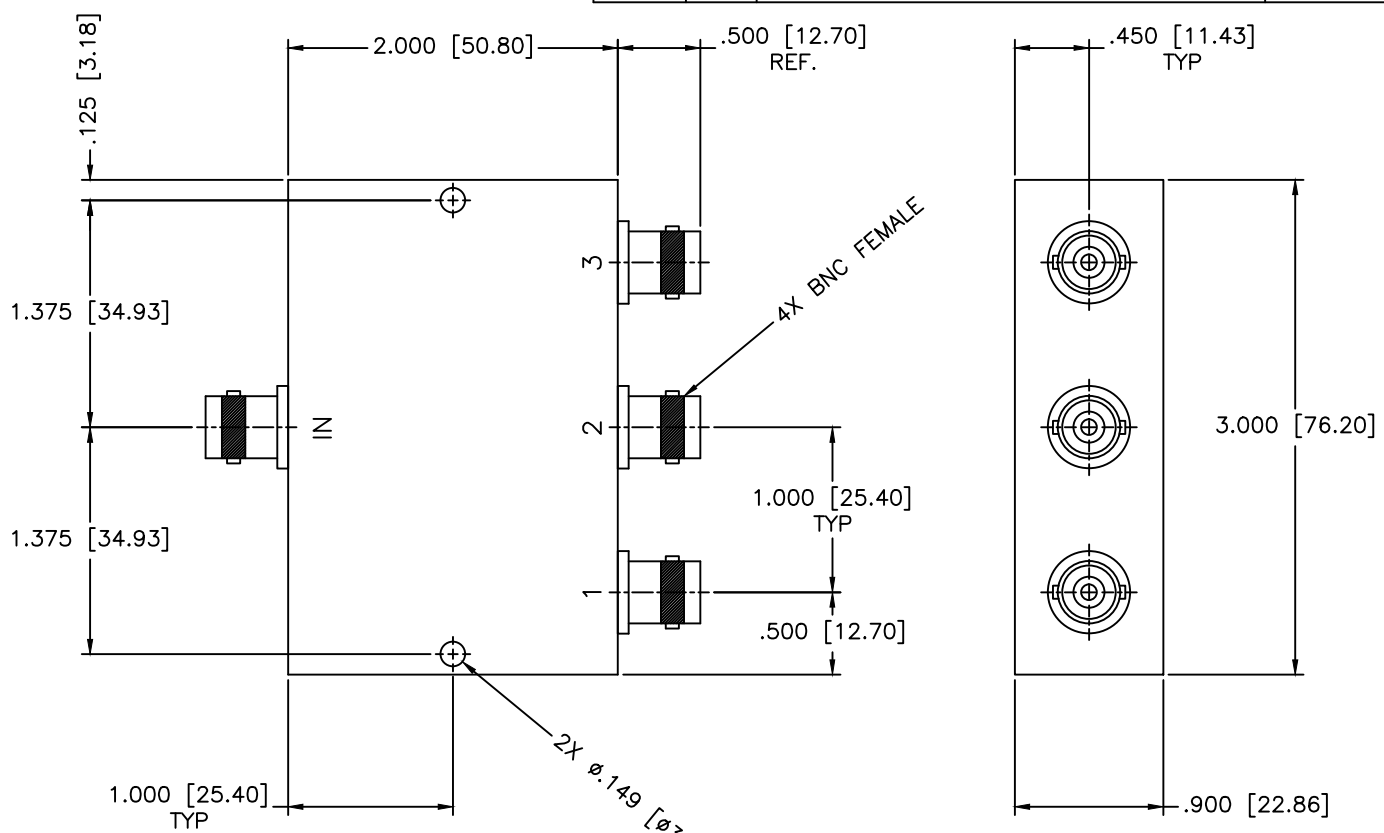

SPECIFICATIONS

Frequency Range: 2–200 MHz
 Isolation: 23dB Min.
 Input Power: 1 Watt Max.
 Insertion Loss: 1.0dB Max.
 Amplitude Balance: ± 0.4 dB Max.
 Phase Balance: ± 3 Deg. Max.
 Impedance: 50 Ohm
 Operating Temperature: -20°C to $+70^{\circ}\text{C}$

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^{\circ}$		DRAWING TITLE:	3-WAY POWER DIVIDER
DRAWN:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.	PL3-15/BF	
DATE:		THIRD ANGLE PROJECTION 		CAGE CODE:	SIZE:	REV:
APPROVED:		DATE:		0D2L5	N/A	N/A
Paiboon Luekhamhan		05-21-2009		DO NOT SCALE THE DRAWING		DWG NO.
T. Nguyen		05-21-2009				84502