


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

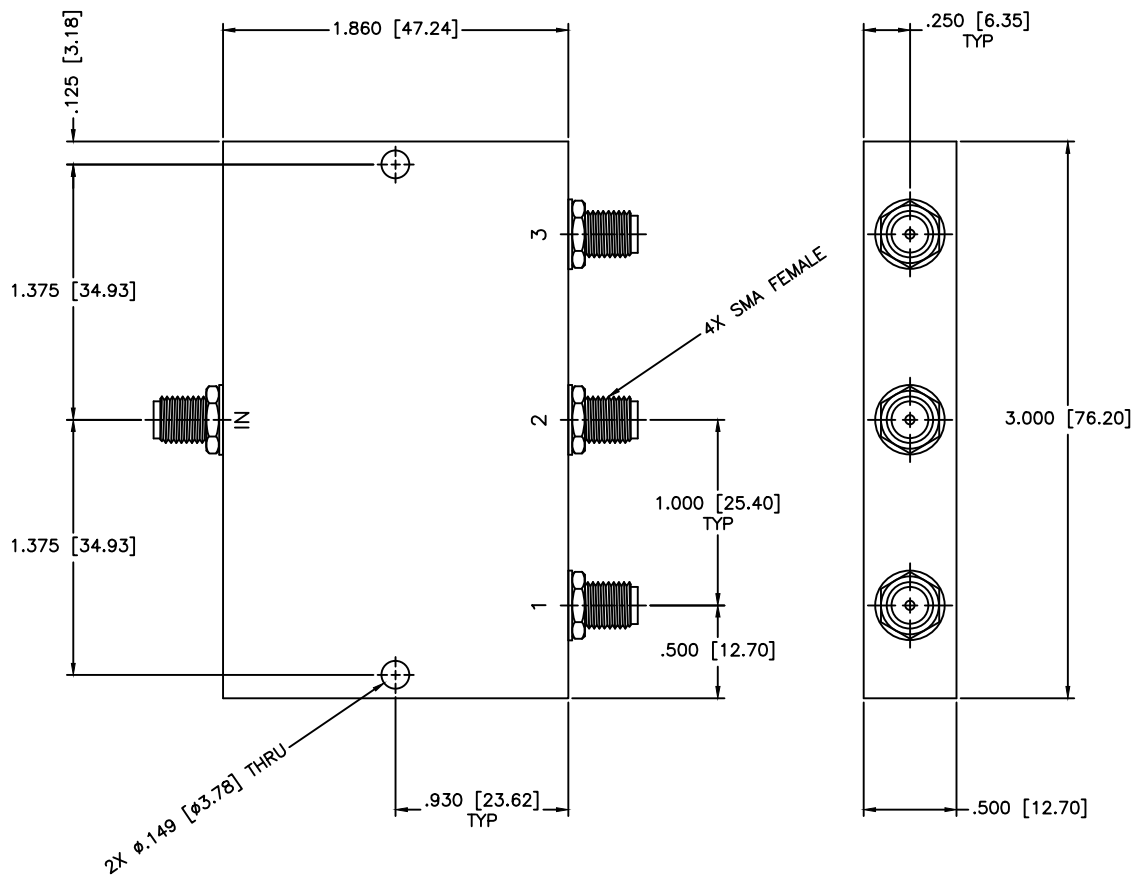

SPECIFICATIONS

Frequency Range: 720–800 MHz
 Isolation: 15dB Min.
 Input Power: 1 Watt Max.
 Insertion Loss: 1.4dB Max.
 Amplitude Balance: ±0.7dB Max.
 Phase Balance: ±5 Deg. Max.
 Impedance: 50 Ohms
 Operating Temperature: –20°C to +70°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	3-WAY POWER DIVIDER
DRAWN:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.:	PL3-17	
APPROVED:		THIRD ANGLE PROJECTION 		CAGE CODE:	SIZE: A	REV: N/A
DATE: 05-21-2009		DATE: 05-21-2009		OD2L5	DWG NO. 84509	
T. Nguyen				DO NOT SCALE THE DRAWING		