


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

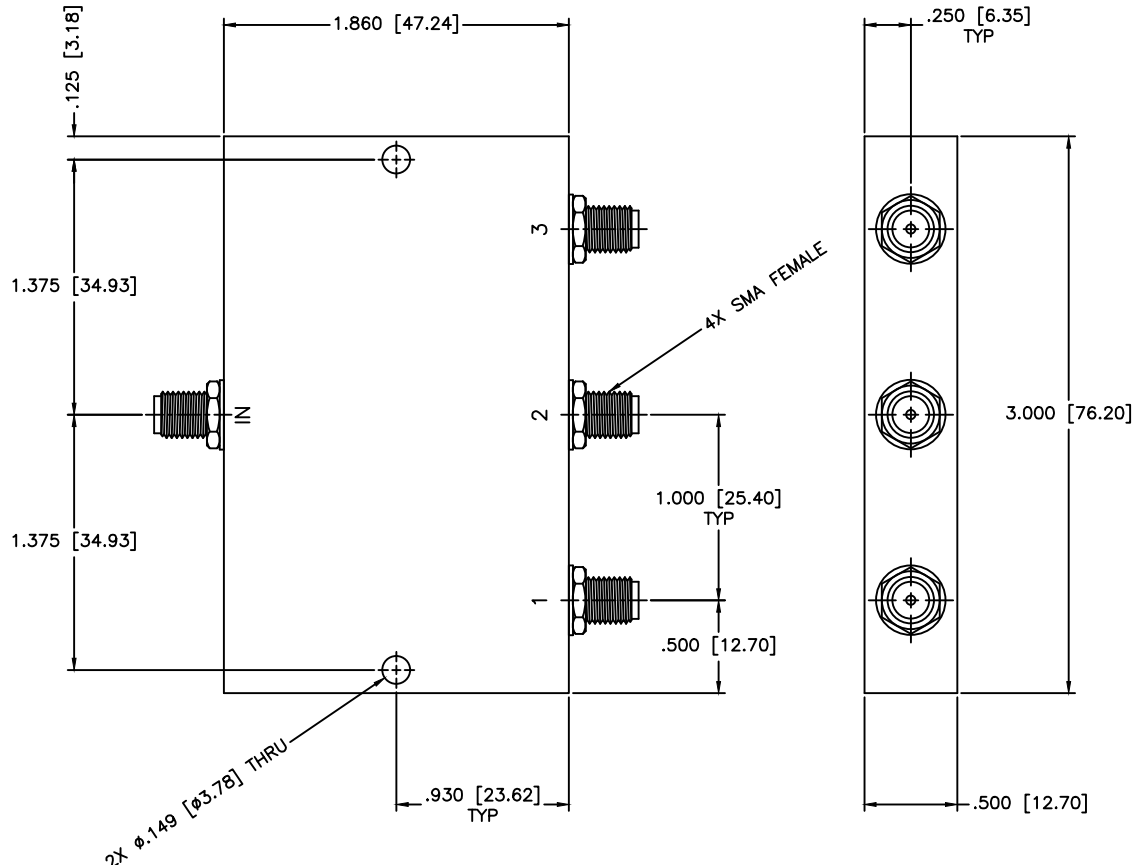

**SPECIFICATIONS**


Frequency Range: 850–950 MHz  
 Isolation: 17dB Typ.  
 Input Power: 1 Watt Max.  
 Insertion Loss: 1.4dB Max.  
 Amplitude Balance:  $\pm 0.7$ dB Max.  
 Phase Balance:  $\pm 5$  Deg. Max.  
 Impedance: 50 Ohms  
 Operating Temperature:  $-20^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^{\circ}$		DRAWING TITLE:			
		3-WAY POWER DIVIDER			
DRAWN:		PART NO.			
Paiboon Luekhamhan		PL3-18			
DATE:	05-21-2009	CAGE CODE:		SIZE:	REV:
APPROVED:	T. Nguyen	OD2L5		A	N/A
DATE:		DWG NO.		DO NOT SCALE THE DRAWING	
05-21-2009		84510			



UNLESS OTHERWISE SPECIFIED:  
 TOLERANCES  
 IN (INCHES) OR [mm] (MILLIMETERS)  
 FRACTIONS:  $\pm 1/64$   
 DECIMALS:  $\pm 0.01 \pm 0.005$   
 ANGLE:  $\pm 1/2^{\circ}$

PROPRIETARY NOTICE:  
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY  
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN  
 PERMISSION FROM MICROWAVE COMMUNICATIONS  
 LABORATORIES INC. (MCLI)



SIZE: A

DO NOT SCALE THE DRAWING