


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

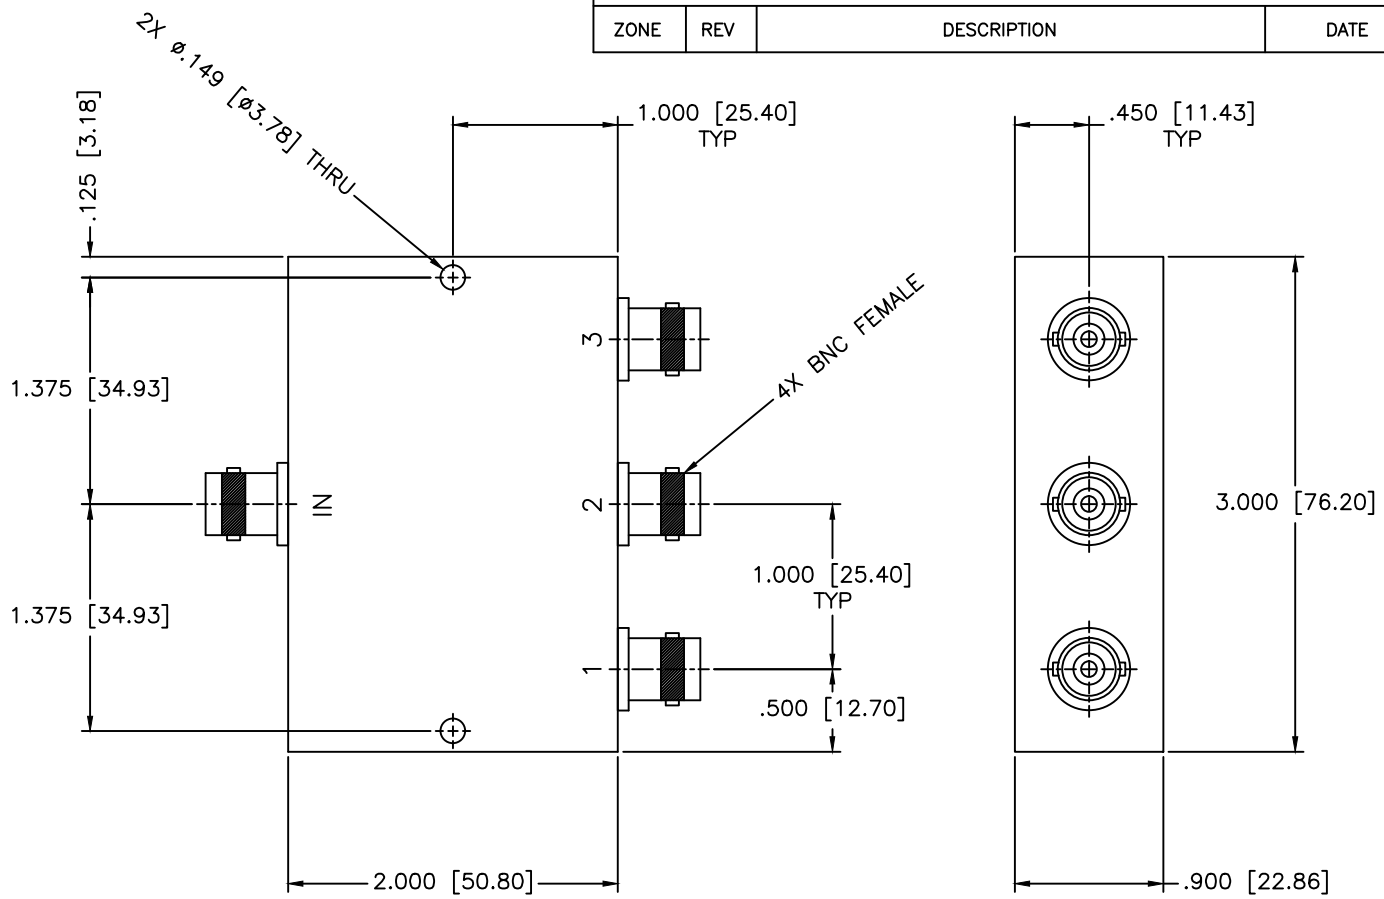

SPECIFICATIONS

- Frequency Range: 850–950 MHz
- Isolation: 17dB Typ.
- Input Power: 1 Watt Max.
- Insertion Loss: 1.4dB Max.
- Amplitude Balance: ±0.7dB Max.
- Phase Balance: ±5 Deg. Max.
- Impedance: 50 Ohms
- Operating Temperature: -20°C to +70°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 3-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 05-21-2009		PART NO. PL3-18/BF	
APPROVED: T. Nguyen		DATE: 05-21-2009		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 84505
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING	