


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

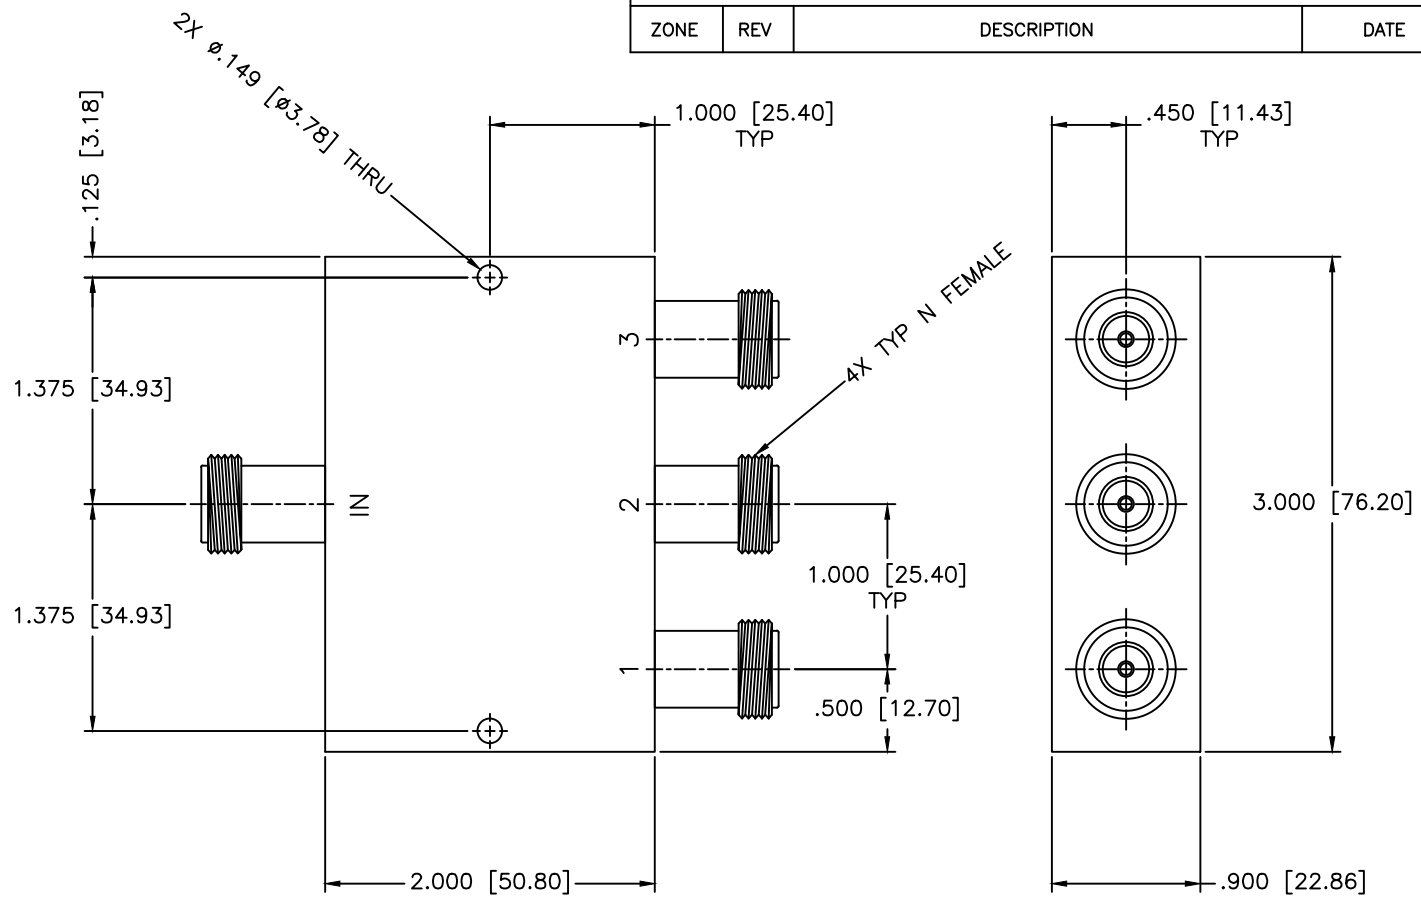

SPECIFICATIONS

- Frequency Range: 850–950 MHz
- Isolation: 17dB Typ.
- Input Power: 1 Watt Max.
- Insertion Loss: 1.4dB Max.
- Amplitude Balance: ± 0.7 dB Max.
- Phase Balance: ± 5 Deg. Max.
- Impedance: 50 Ohms
- Operating Temperature: -20°C to $+70^{\circ}\text{C}$

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^{\circ}$	DRAWING TITLE:		SHEET:
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.		3-WAY POWER DIVIDER	
DRAWN:		DATE:		PART NO.		
Paiboon Luekhamhan		05-21-2009		PL3-18/NF		
APPROVED:		DATE:		CAGE CODE:	SIZE:	REV:
T. Nguyen		05-21-2009		OD2L5	N/A	N/A
				DO NOT SCALE THE DRAWING		DWG NO.
						84505