


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

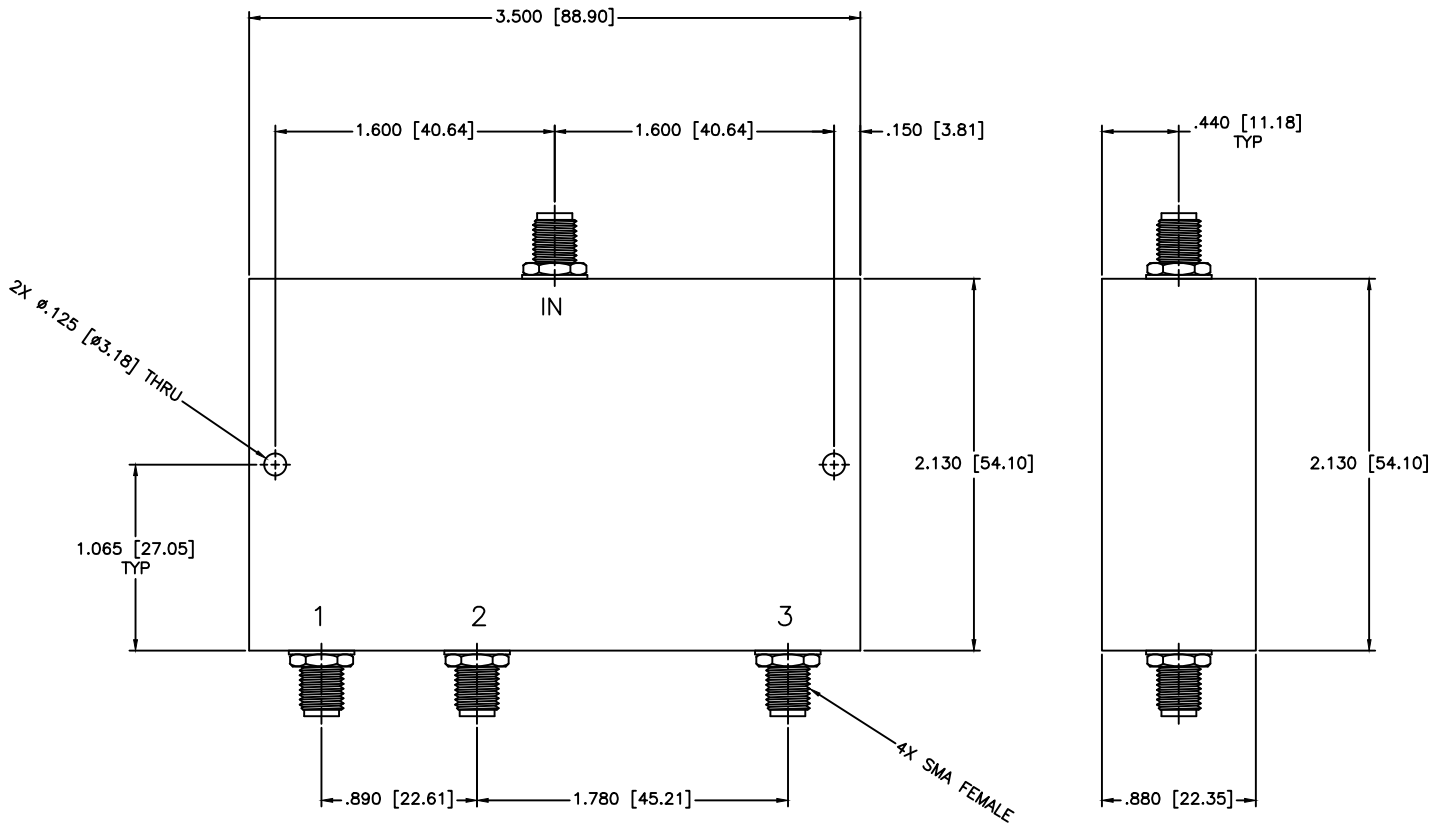

SPECIFICATIONS

Frequency Range: 500–2200 MHz
 Insertion Loss: 1.0dB Max. (above 4.8dB)
 Isolation: 25dB, 14dB Min.
 Amplitude balance: ±0.7dB
 VSWR In/Out: 1.30:1 Typ /1.20:1 Typ
 Input Power: 10 Watts Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
					SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 3-WAY POWER DIVIDER			
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PL3-22			
DRAWN: Paiboon Luekhamhan	DATE: 01-05-2011		CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 85193
APPROVED: T. Nguyen	DATE: 01-05-2011		DO NOT SCALE THE DRAWING			