


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

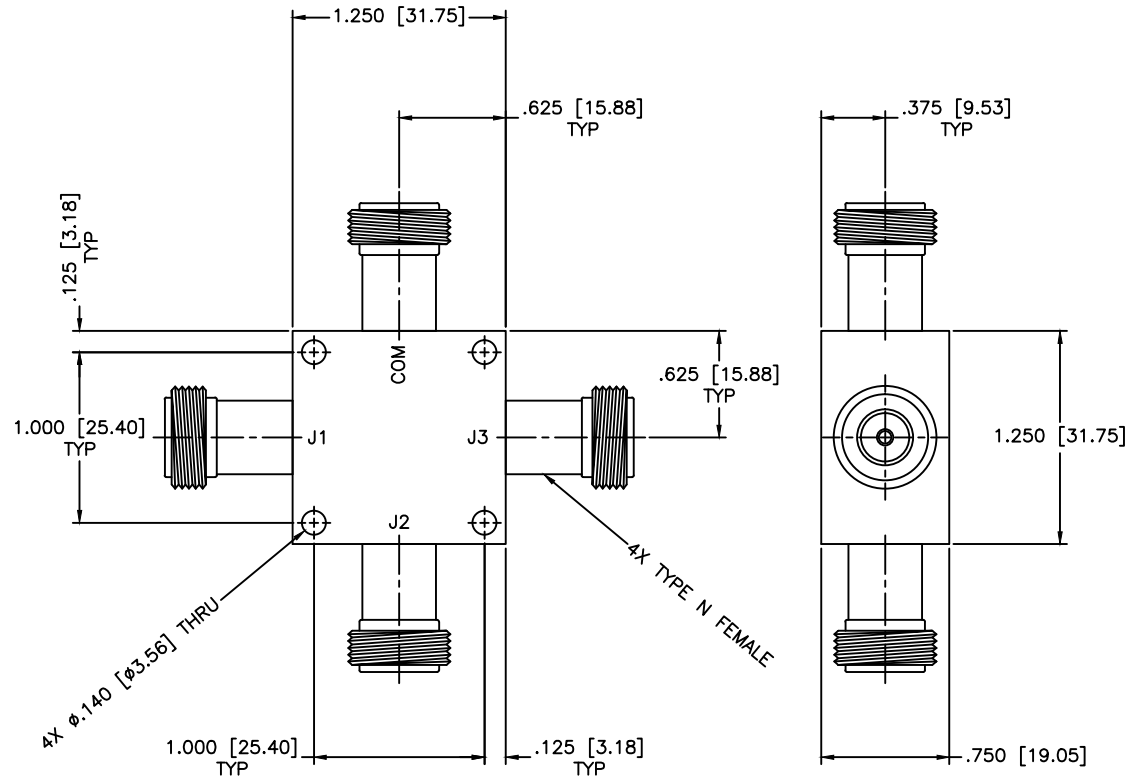

**SPECIFICATIONS**

Frequency Range: 10–1500 MHz  
 Insertion Loss: 1.6dB Max.  
 Isolation: 18dB Min.  
 VSWR: 1.60:1 Max.  
 Amplitude Balance: ±0.5dB Max.  
 Phase Balance: ±5 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		SHEET:
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.		3-WAY POWER DIVIDER	
DRAWN:		DATE:	PL3-28/NF			
Paiboon Luekhamhan		01-17-2007	CAGE CODE:		SIZE:	REV:
APPROVED:		DATE:	OD2L5		N/A	N/A
T. Nguyen		01-17-2007	DO NOT SCALE THE DRAWING		DWG NO.	
					82751	