


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

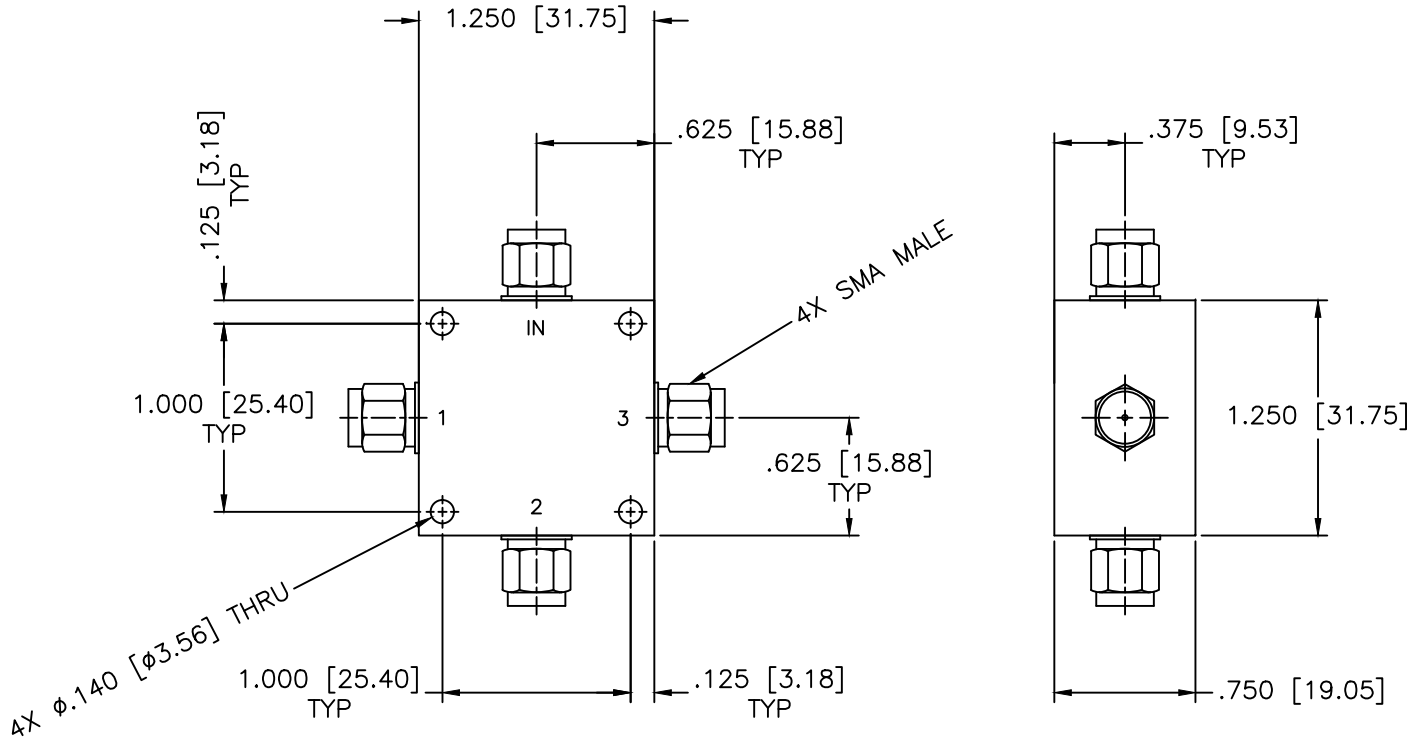

SPECIFICATIONS

FREQUENCY RANGE	5-500 MHz		
BANDS	LB	MB	UB
ISOLATION (dB) TYP/MIN	30/20	30/20	25/18
INSERTION LOSS (dB) TYP/MAX	0.4/0.75	0.5/0.9	0.8/1.2
PHASE UNBALANCE (Deg.) MAX	2.0°	3.0°	4.0°
AMPLITUDE UNBALANCE (dB) MAX	0.2	0.3	0.4

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°</small>		DRAWING TITLE: 3-WAY POWER DIVIDER		
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		PART NO.: PL3-29/SM		
DRAWN: Paiboon Luekhamhan	DATE: 10-22-1997	<small>THIRD ANGLE PROJECTION</small> 	CAGE CODE:	OD2L5
APPROVED: T. Nguyen	DATE: 10-22-1997		SIZE: A	REV: N/A
DO NOT SCALE THE DRAWING				