


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

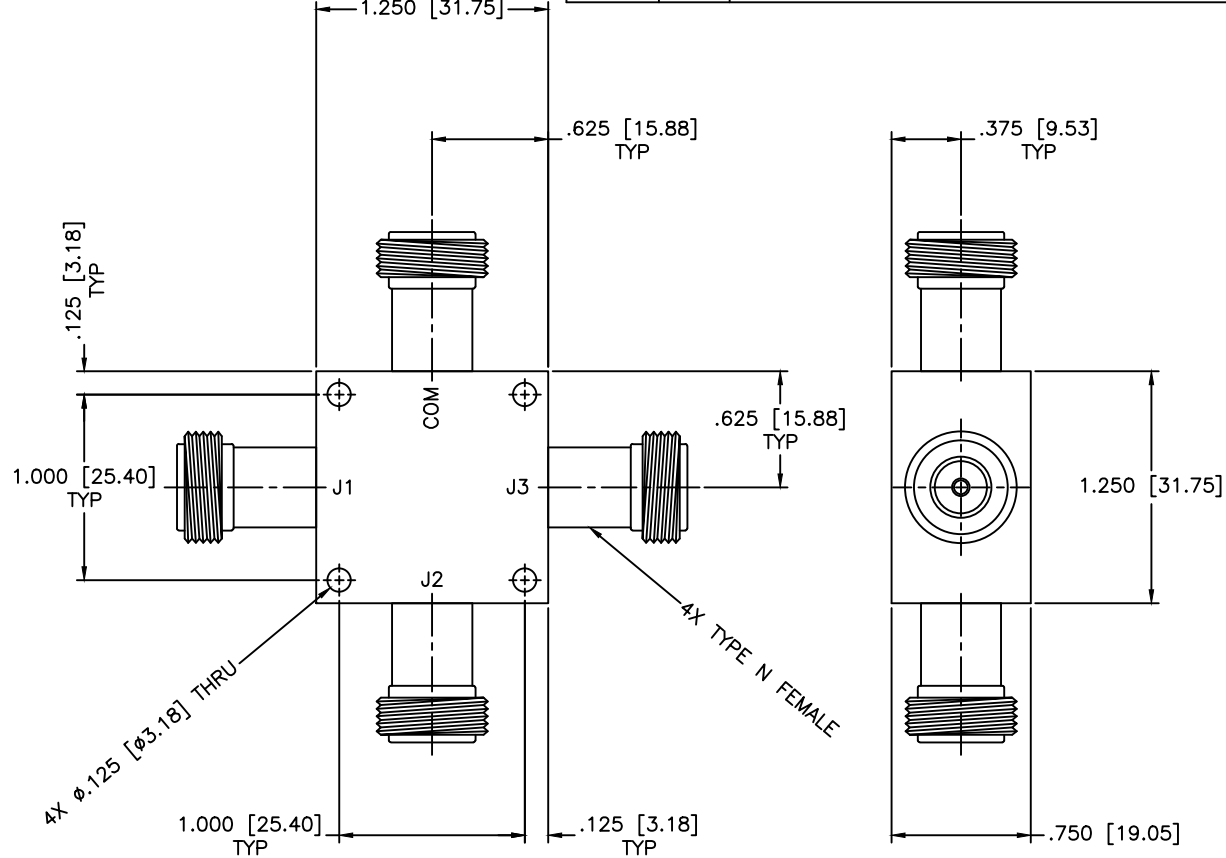

SPECIFICATIONS

Frequency Range: 10–500 MHz
 Isolation: 30dB Min.
 VSWR: 1.30:1 Max.
 Insertion Loss: 0.7dB Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±2 Deg. Max.

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 3-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 10-22-1997	PART NO. PL3-2/NF	
APPROVED: T. Nguyen		DATE: 10-22-1997	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO. 80145
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DO NOT SCALE THE DRAWING	
		THIRD ANGLE PROJECTION		