


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

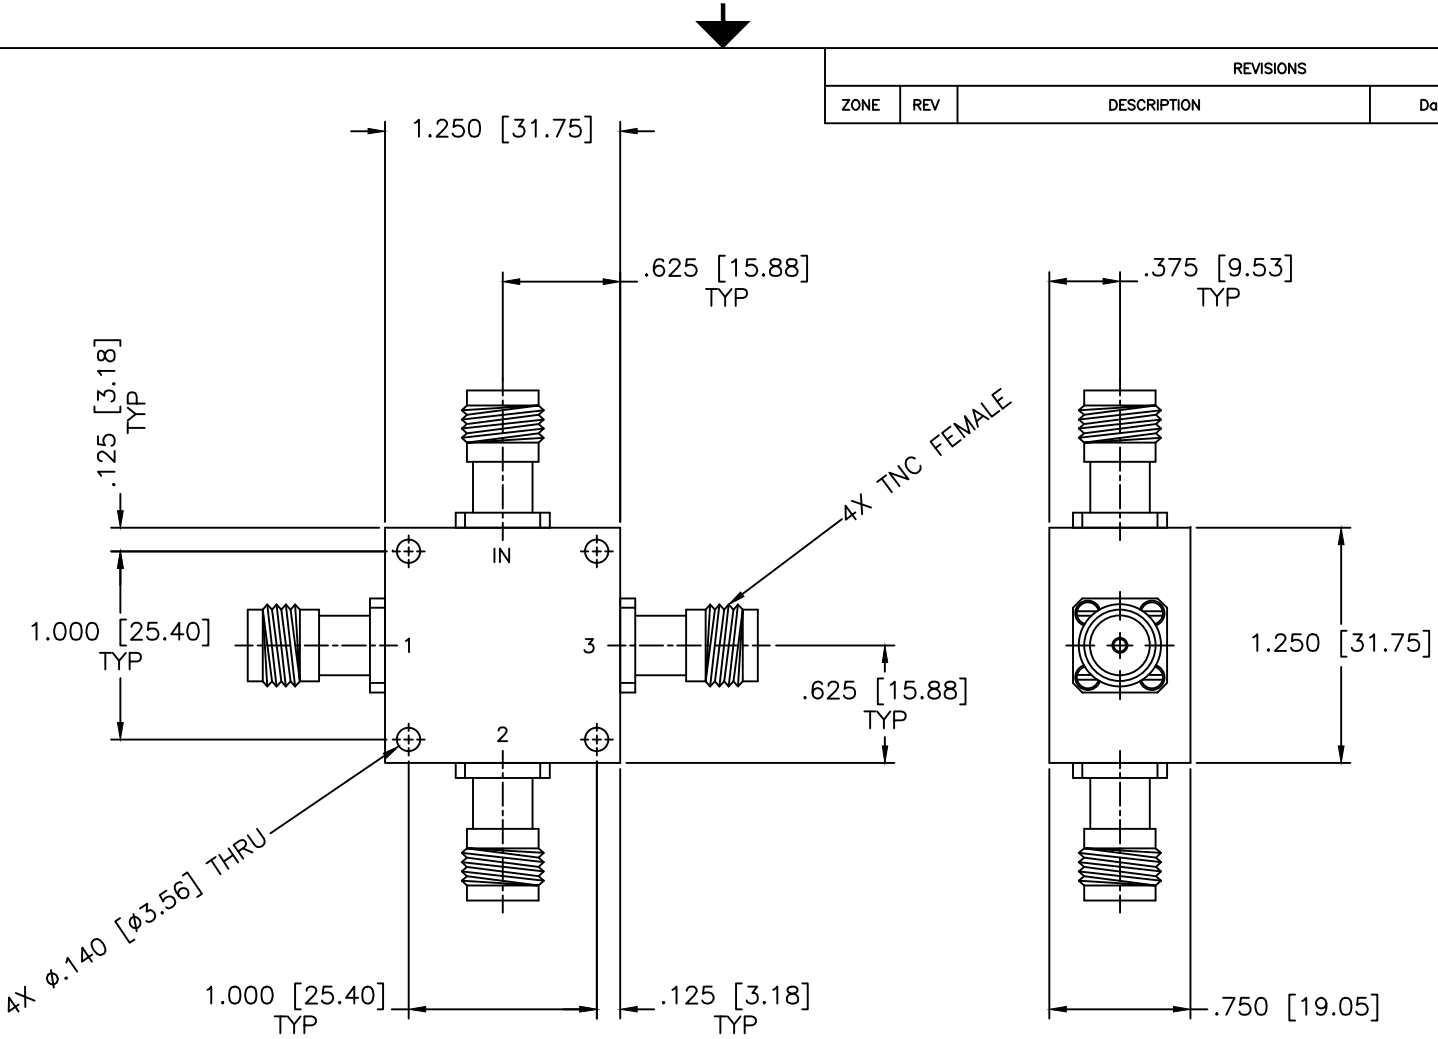

SPECIFICATIONS

- Frequency Range: 5–500 MHz
- Isolation: 23dB Min.
- VSWR: 1.30:1 Max.
- Insertion Loss: 1.0dB Max.
- Amplitude Balance: ±0.3dB Max.
- Phase Balance: ±3 Deg. Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 11-27-2007
APPROVED: T. Nguyen	DATE: 11-27-2007



MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE:
3-WAY POWER DIVIDER

PART NO.
PL3-2/TNC

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)
THIRD ANGLE PROJECTION

CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 83002
DO NOT SCALE THE DRAWING			

