


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

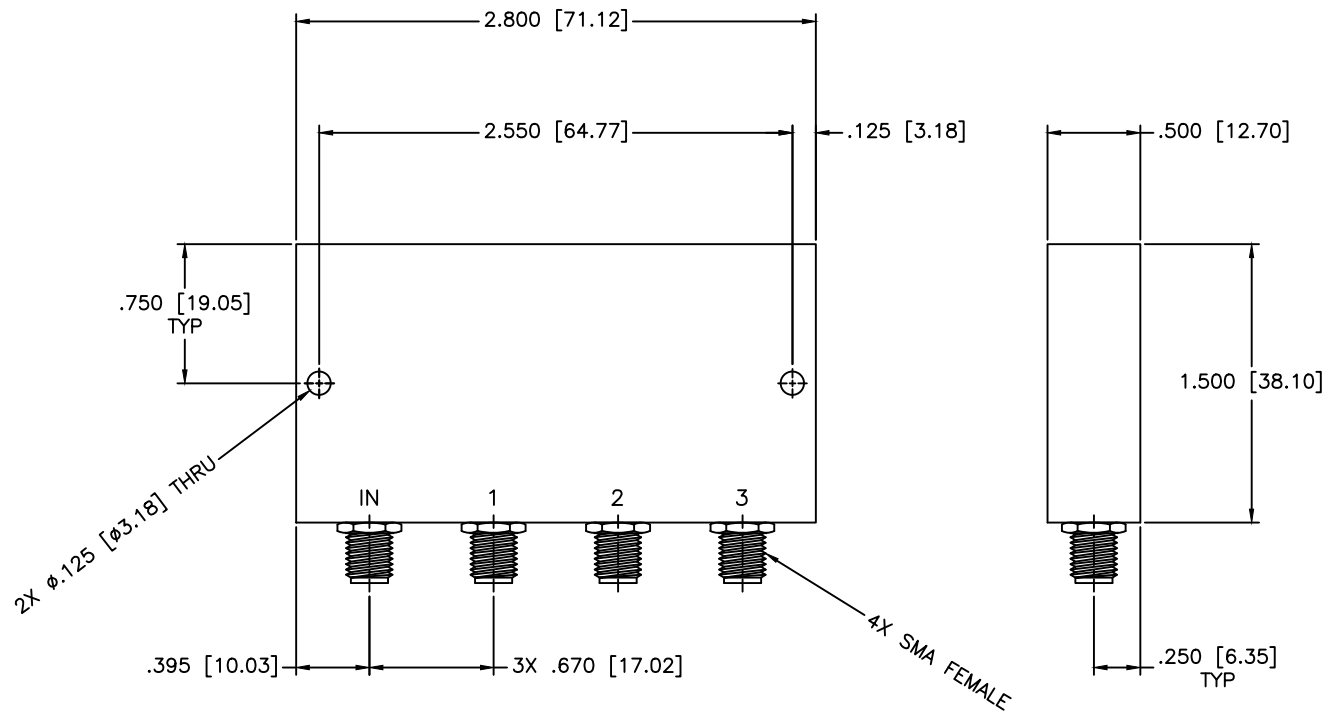

**SPECIFICATIONS**

- Frequency Range: 10–500 MHz
- Insertion Loss: 1.0dB Max.
- Isolation: 23dB Min.
- VSWR: 1.30:1 Max.
- Phase Balance: ±3 Deg. Max.
- Amplitude Balance: ±0.30dB Max.
- Input Power: 3 Watts Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE:		3-WAY POWER DIVIDER			
PART NO.:		PL3-3-2			
DRAWN: Paiboon Luekhamhan	DATE: 03-10-2009	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO. 84262
APPROVED: T. Nguyen	DATE: 03-10-2009	THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING	