
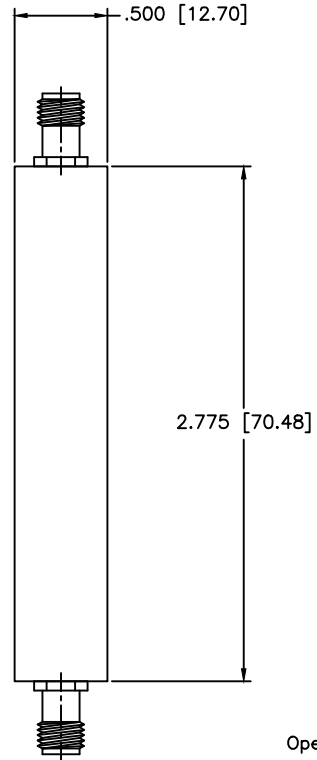


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

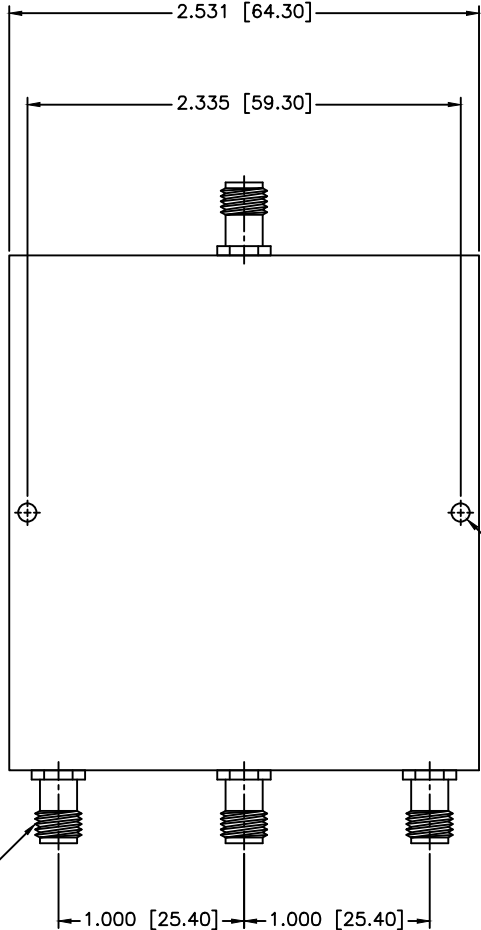

SPECIFICATIONS

Frequency Range: 200–800 MHz
 Isolation: 20dB Min.
 VSWR In/Out: 1.50:1/1.30:1 Max.
 Insertion Loss: 0.8dB Max.
 Amplitude Balance: ±0.3dB Max.
 Phase Balance: ±5 Deg. Max.
 Impedance: 50 Ohm
 Power Handling: 30W
 Operating Temperature: –30°C to +60°C

4X SMA FEMALE

MATERIAL:	
DRAWN:	DATE:
Paiboon	01-16-2024
APPROVED:	DATE:
Peter Nguyen	01-16-2024

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 3-WAY POWER DIVIDER
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PL3-31
THIRD ANGLE PROJECTION	CAGE CODE: OD2L5
	SIZE: A
	REV: N/A
	DWG NO. 84506
DO NOT SCALE THE DRAWING	