


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

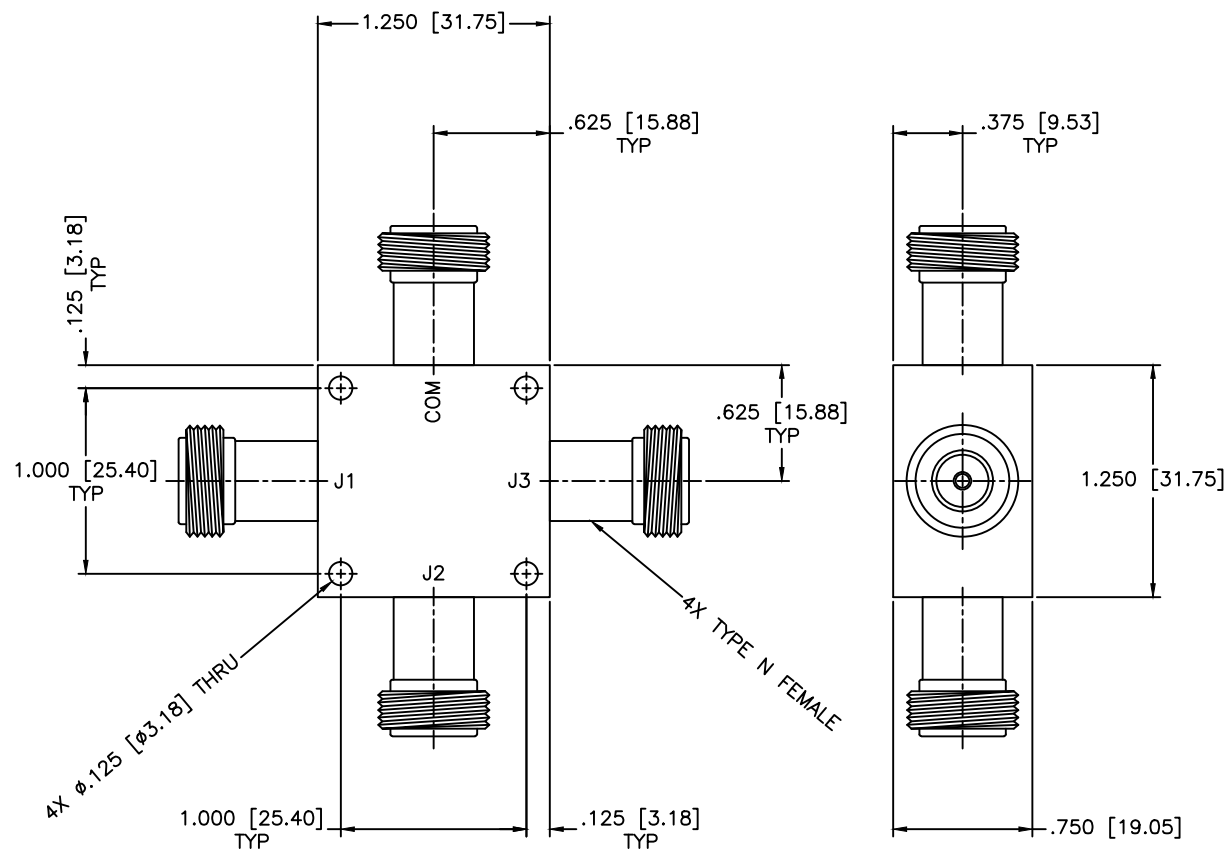

SPECIFICATIONS

Frequency Range: 200–750 MHz
 Isolation: 25dB Min.
 VSWR: 1.30:1 Max.
 Insertion Loss: 1.0dB Max.
 Amplitude Balance: ±0.3dB Max.
 Phase Balance: ±5 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	3-WAY POWER DIVIDER
DRAWN:		DATE:		PART NO.		
Paiboon Luekhamhan		10-23-1997		PL3-4/NF		
APPROVED:		DATE:		CAGE CODE:	SIZE:	REV:
T. Nguyen		10-23-1997		OD2L5	A	N/A
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		DWG NO.
		THIRD ANGLE PROJECTION 				80147