


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

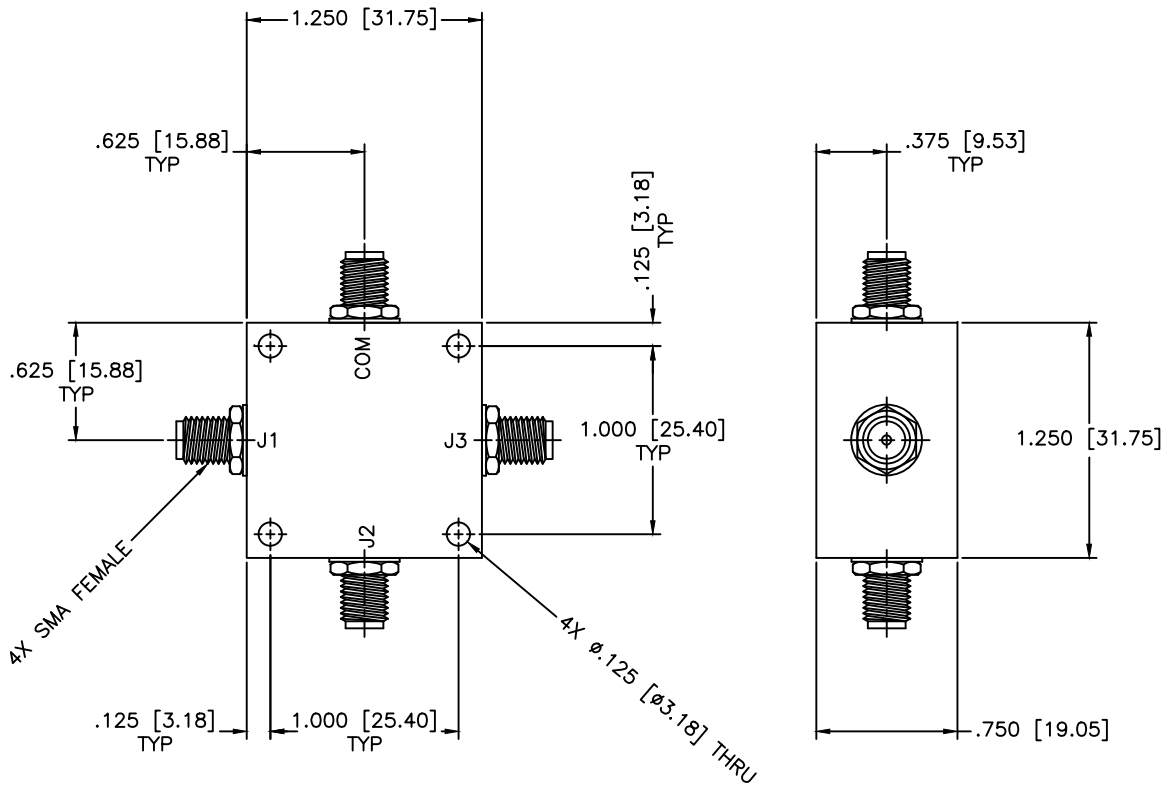

SPECIFICATIONS

Frequency Range: 100–1000 MHz
 Insertion Loss: 1dB Max.
 Isolation: 23dB Min.
 VSWR: 1.50:1 Max.
 Amplitude Balance: ±0.3dB Max.
 Phase Balance: ±4 Deg. Max.
 Power: 1 Watt

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-22-1997
APPROVED: T. Nguyen	DATE: 10-22-1997

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ± .01 ± .005
 ANGLE: ± 1/2°

SCALE:	N/A		
SHEET:	N/A		
DRAWING TITLE:	3-WAY POWER DIVIDER		
PART NO.:	PL3-5		
CAGE CODE:	SIZE: A	REV: N/A	DWG NO. 80137
OD2L5	DO NOT SCALE THE DRAWING		

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)
 THIRD ANGLE PROJECTION