


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

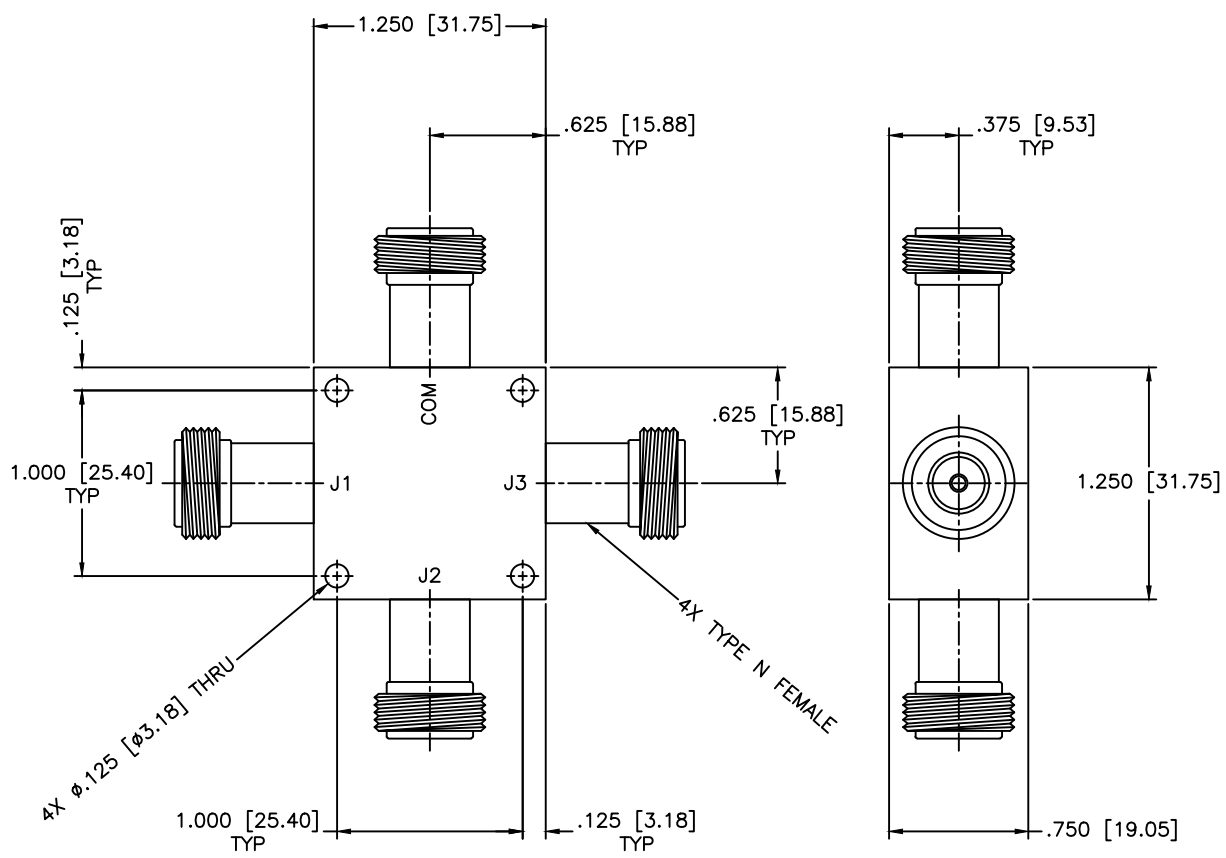

**SPECIFICATIONS**

Frequency Range: 500–1000 MHz  
 Isolation: 25dB Min.  
 VSWR: 1.30:1 Max.  
 Insertion Loss: 1.0dB Max.  
 Amplitude Balance: ±0.5dB Max.  
 Phase Balance: ±6 Deg. Max.

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWING TITLE:		3-WAY POWER DIVIDER		
PART NO.:		PL3-6/NF		
DRAWN:	DATE:	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	CAGE CODE:	SIZE: A
APPROVED:	DATE:		OD2L5	REV: N/A
Paiboon Luekhamhan T. Nguyen		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING	