


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

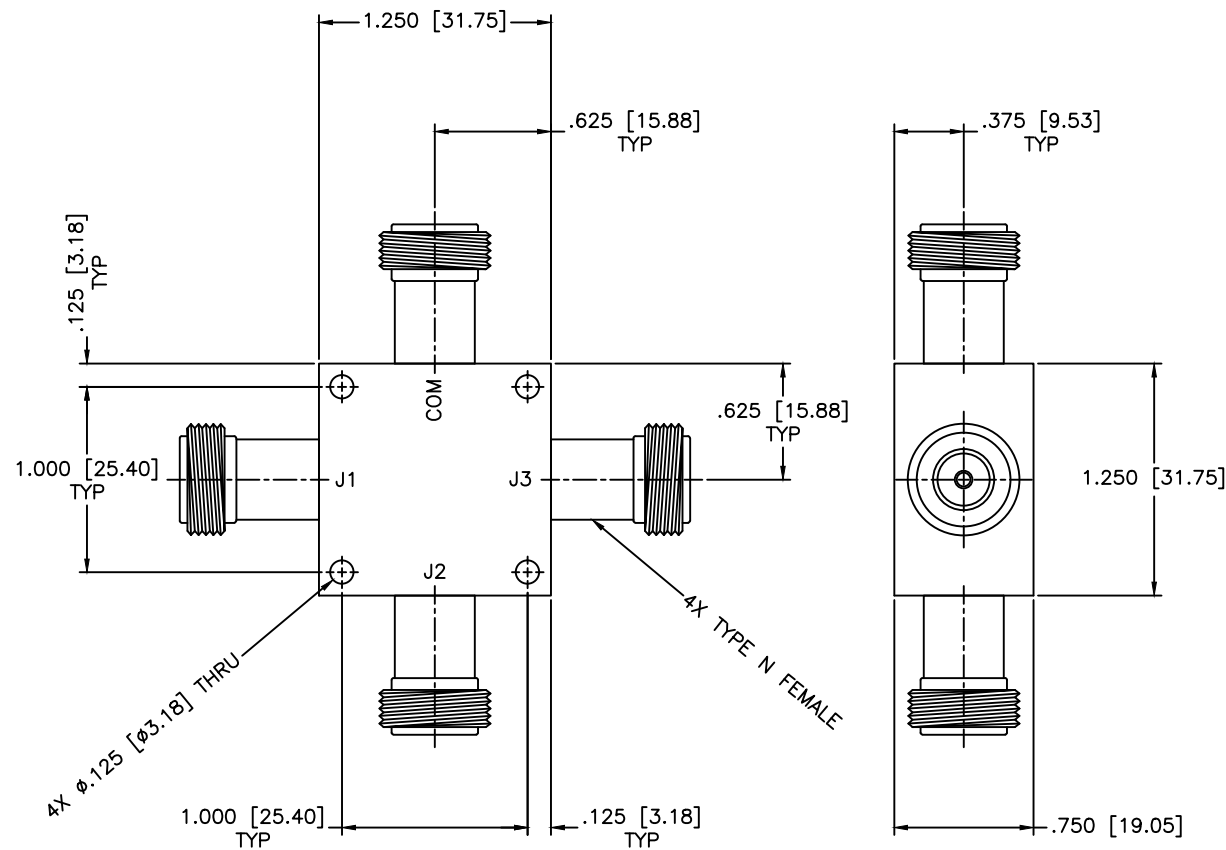

**SPECIFICATIONS**

Frequency Range: 850–1500 MHz  
 Isolation: 30dB Min.  
 VSWR: 1.30:1 Max.  
 Insertion Loss: 1.5dB Max.  
 Amplitude Balance: ±0.3dB Max.  
 Phase Balance: ±8 Deg. Max.

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:	3-WAY POWER DIVIDER
DRAWN:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.	PL3-8/NF
DATE:	10-23-1997		CAGE CODE:	OD2L5
APPROVED:	T. Nguyen	DATE:	10-23-1997	SIZE: A REV: N/A DWG NO. 80151
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		