


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

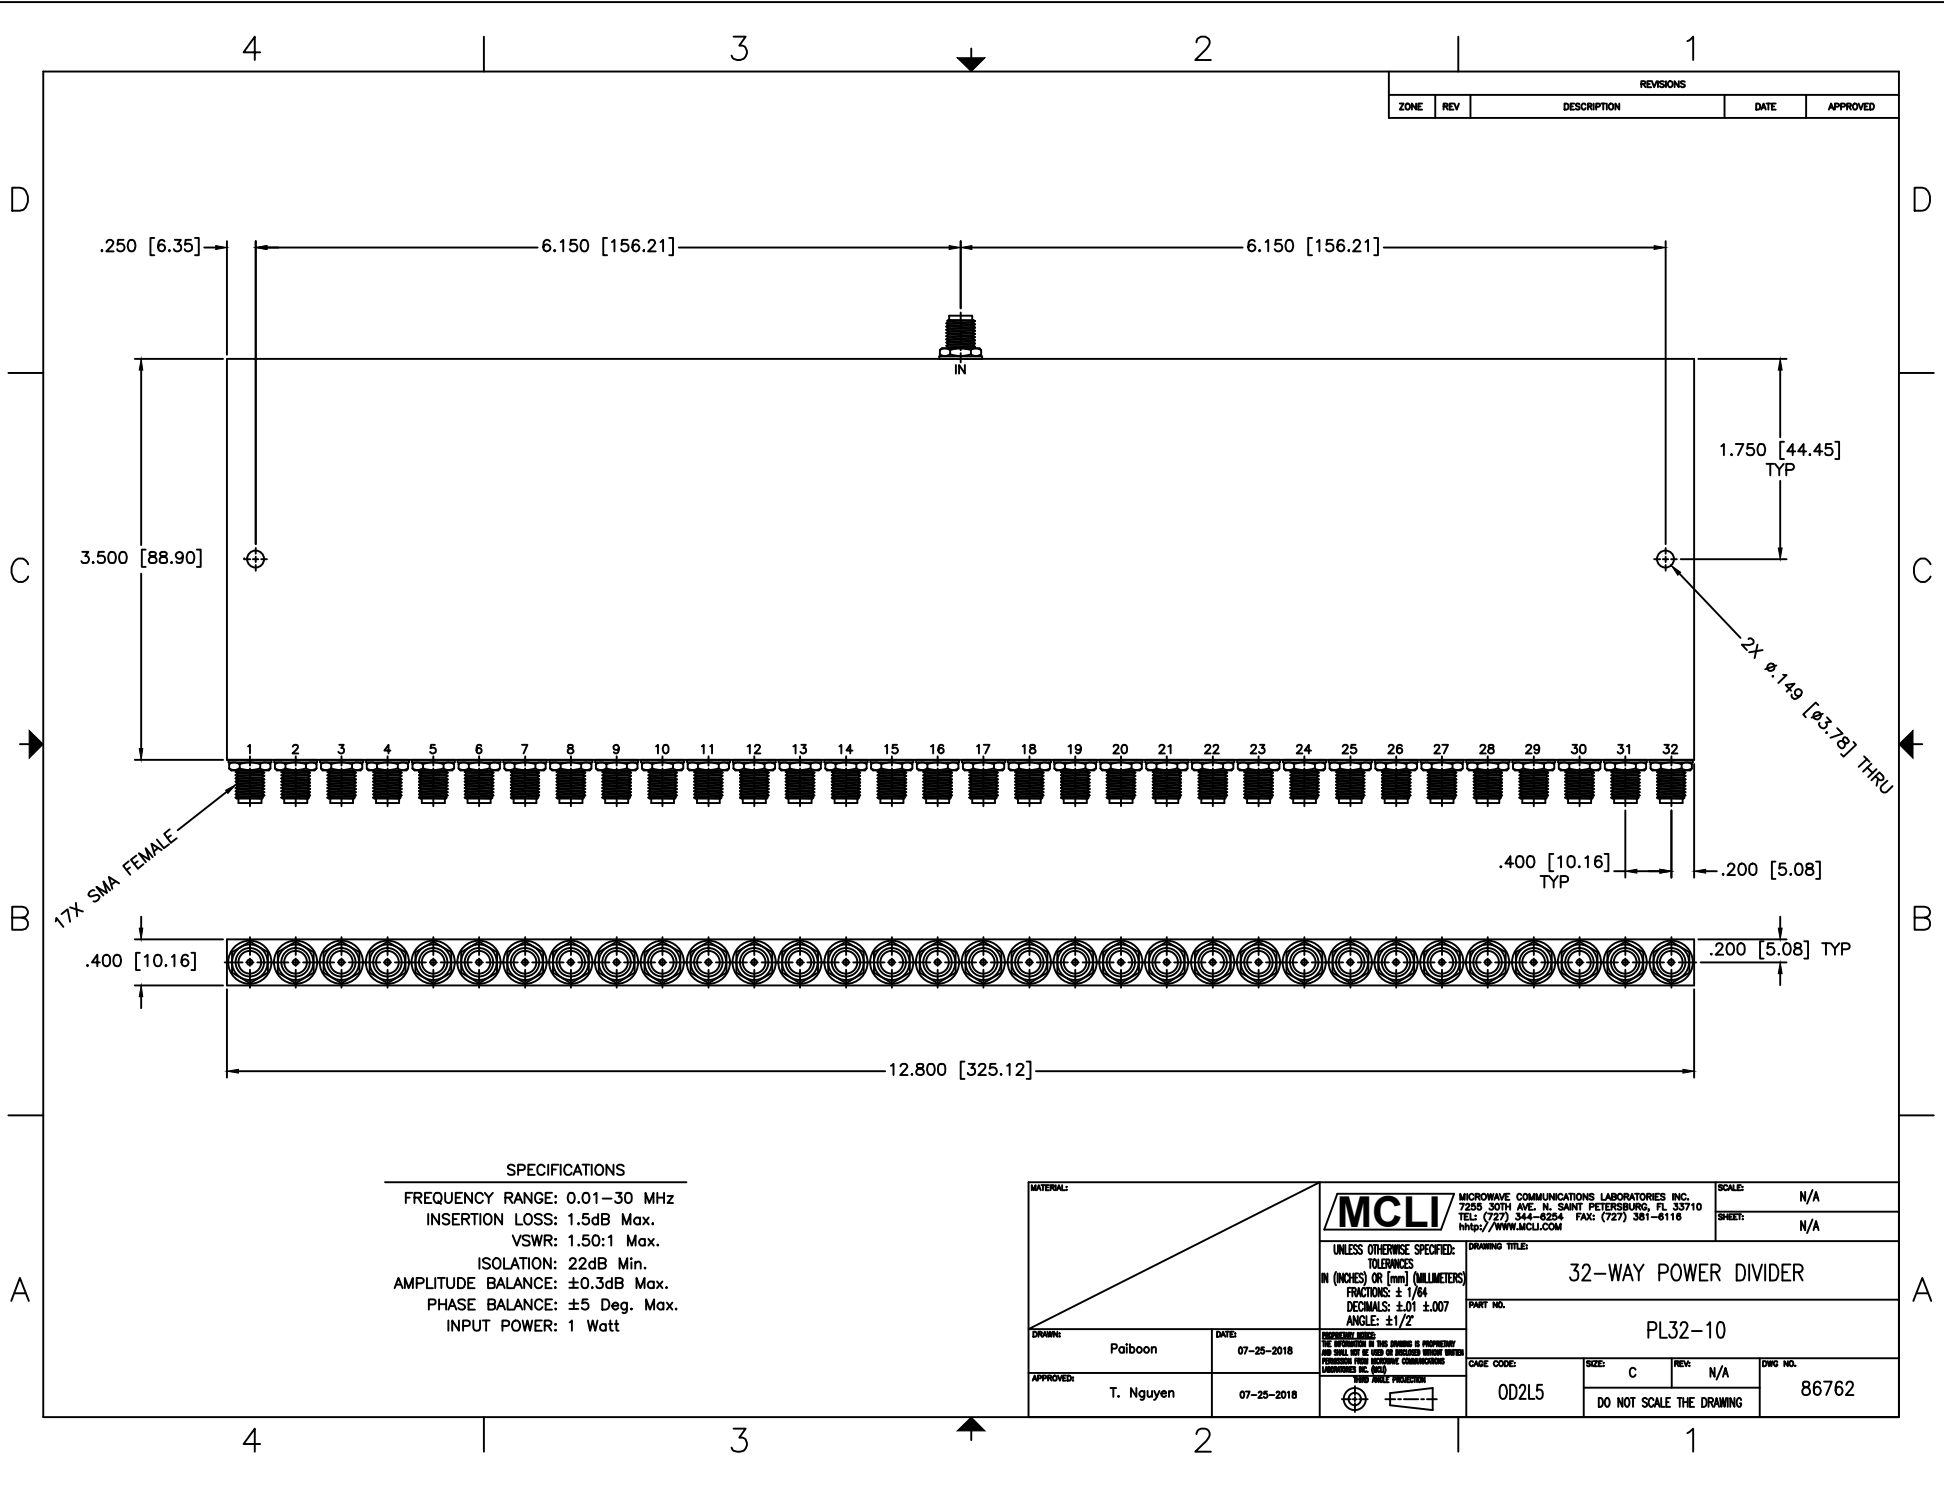

SPECIFICATIONS

FREQUENCY RANGE: 0.01–30 MHz
 INSERTION LOSS: 1.5dB Max.
 VSWR: 1.50:1 Max.
 ISOLATION: 22dB Min.
 AMPLITUDE BALANCE: ±0.3dB Max.
 PHASE BALANCE: ±5 Deg. Max.
 INPUT POWER: 1 Watt

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8118 http://www.mcli.com		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .007 ANGLE: ± 1/2°		DRAWING TITLE:		32-WAY POWER DIVIDER		SHEET: N/A
DRAWING: Paiboon		DATE: 07-25-2018		PART NO. PL32-10		
APPROVED: T. Nguyen		DATE: 07-25-2018		CAGE CODE: OD2L5		
				SIZE: C		
				REV: N/A		
				DO NOT SCALE THE DRAWING		DWG NO. 86762