REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

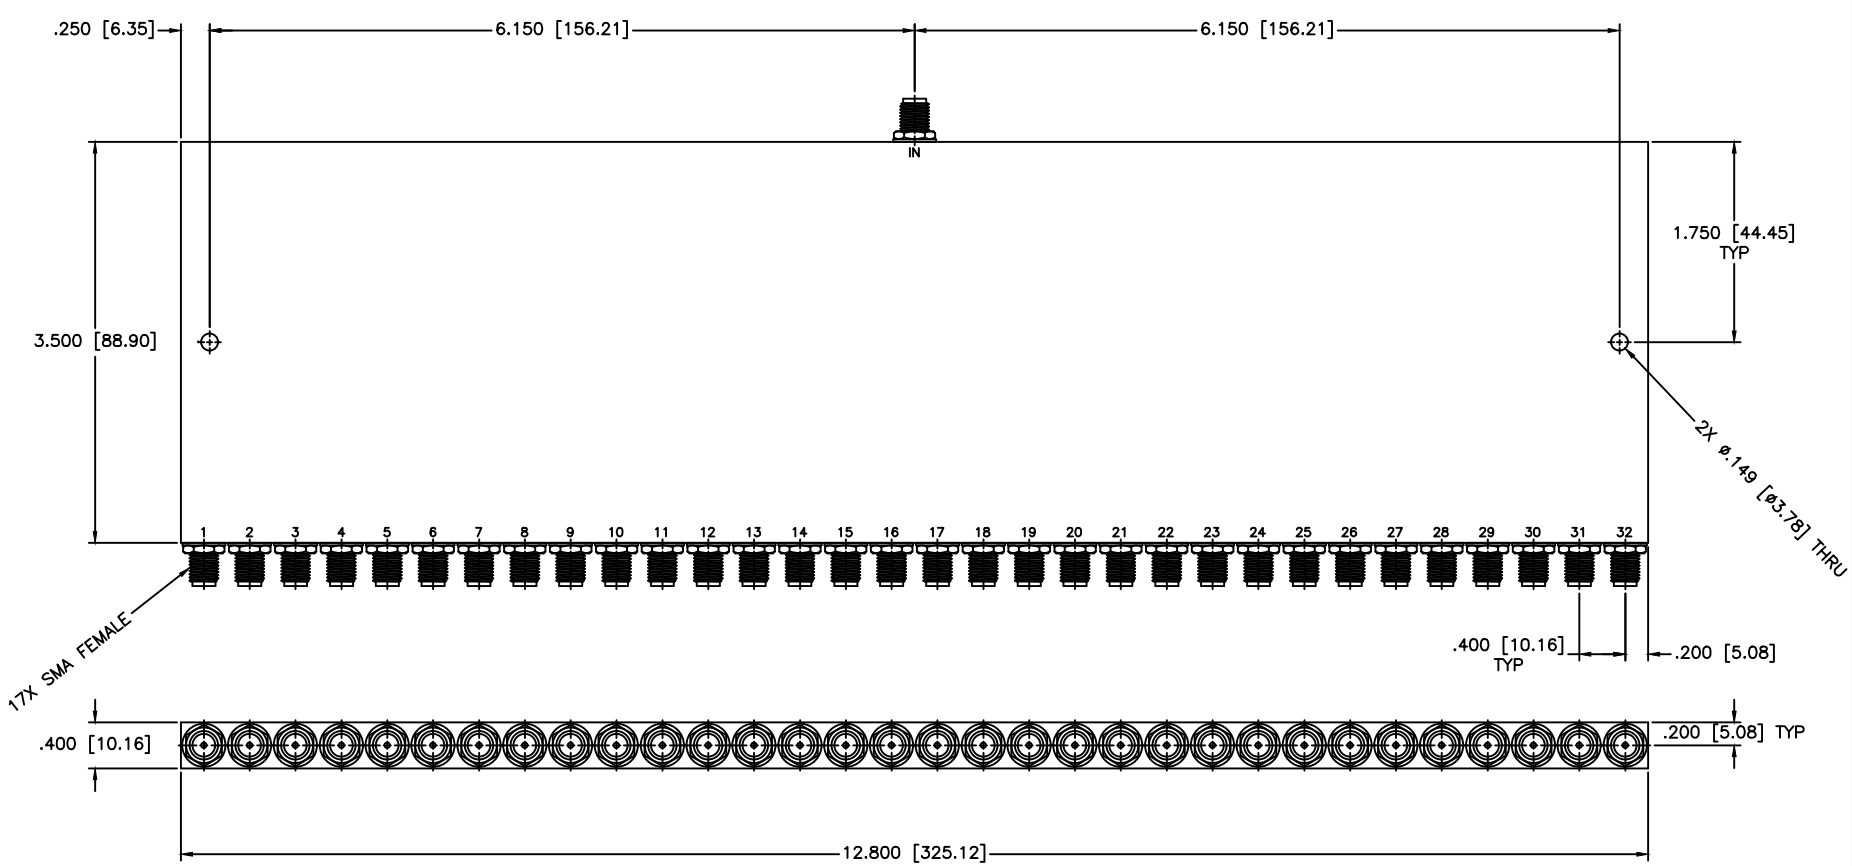

SPECIFICATIONS

FREQUENCY RANGE: 0.05–100 MHz
INSERTION LOSS: 1.6dB Max.
VSWR: 1.50:1 Max.
ISOLATION: 20dB Min.
AMPLITUDE BALANCE: ±0.5dB Max.
PHASE BALANCE: ±9 Deg. Max.
INPUT POWER: 1 Watt

MATERIAL:

DRAWN: Paiboon — DATE: 07-25-2018
APPROVED: T. Nguyen — 07-25-2018

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.007
ANGLE: ±1/2°

THIRD ANGLE PROJECTION

MCLI
MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-8254 FAX: (727) 381-6116
http://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

DRAWING TITLE: 32-WAY POWER DIVIDER

PART NO. PL32-11

CAGE CODE: 0D2L5
SIZE: C
REV: N/A
DWG NO. 86763

DO NOT SCALE THE DRAWING