


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

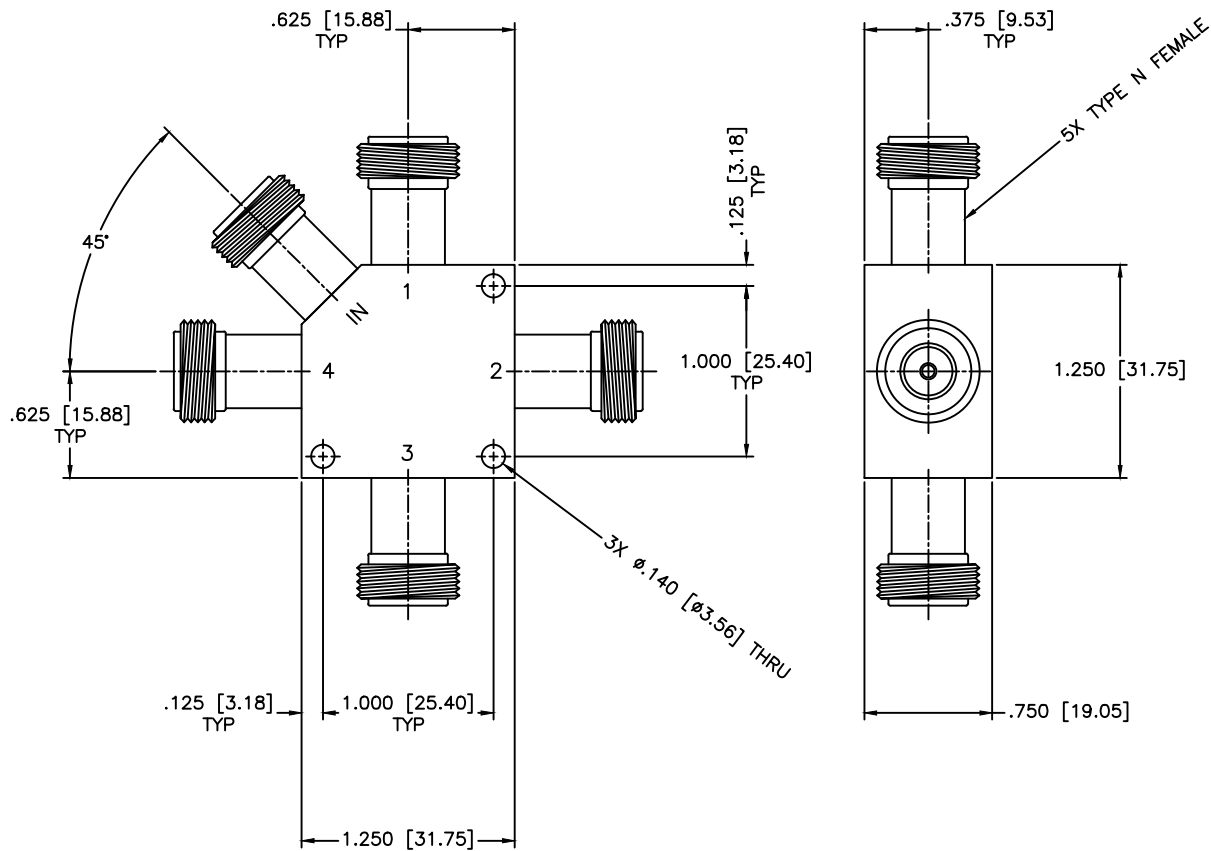

SPECIFICATIONS

Frequency Range: 1–200 MHz
 Isolation: 20dB Min.
 VSWR: 1.50:1 Max.
 Insertion Loss: 0.7dB Typ.
 Amplitude Balance: ±0.30dB Max.
 Phase Balance: ±10 Deg. Max.
 Impedance: 50 Ohms

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		SHEET:	N/A
DRAWN:		DATE:		PART NO.			4-WAY POWER DIVIDER PL4-17/NF
Paiboon Luekhamhan T. Nguyen		09-02-1998 09-02-1998		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	
APPROVED:		DATE:		SIZE:	REV:	DWG NO.	
				N/A	A	81191	
				DO NOT SCALE THE DRAWING			