


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

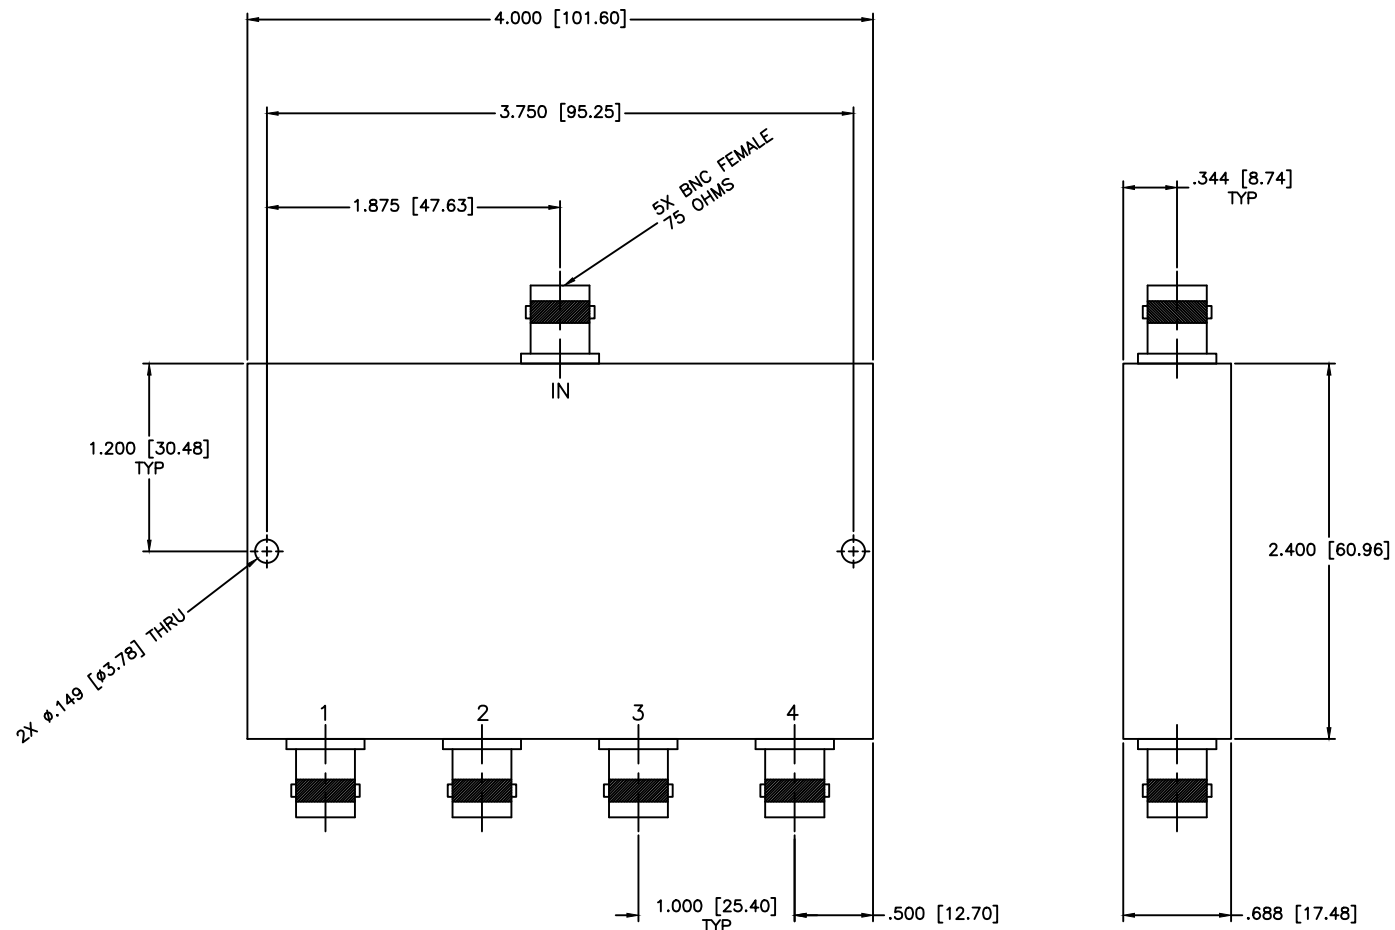

SPECIFICATIONS

- Frequency Range: 1-200 MHz
- Isolation: 20dB Min.
- Insertion Loss: 1.2dB Max.
- Amplitude Balance: ± 0.3 dB Max.
- VSWR: 1.05:1 Max.
- Phase Balance: $\pm 6^\circ$ Max.
- Impedance: 75 Ohm
- Input Power: 1 Watt Max

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$			DRAWING TITLE: 2-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 11-08-2000		PART NO.: PL4-2-75/BF		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	
APPROVED: T. Nguyen DATE: 11-08-2000		CAGE CODE: OD2L5		SIZE: A REV: N/A	DWG NO.: 81571
		THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	