


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

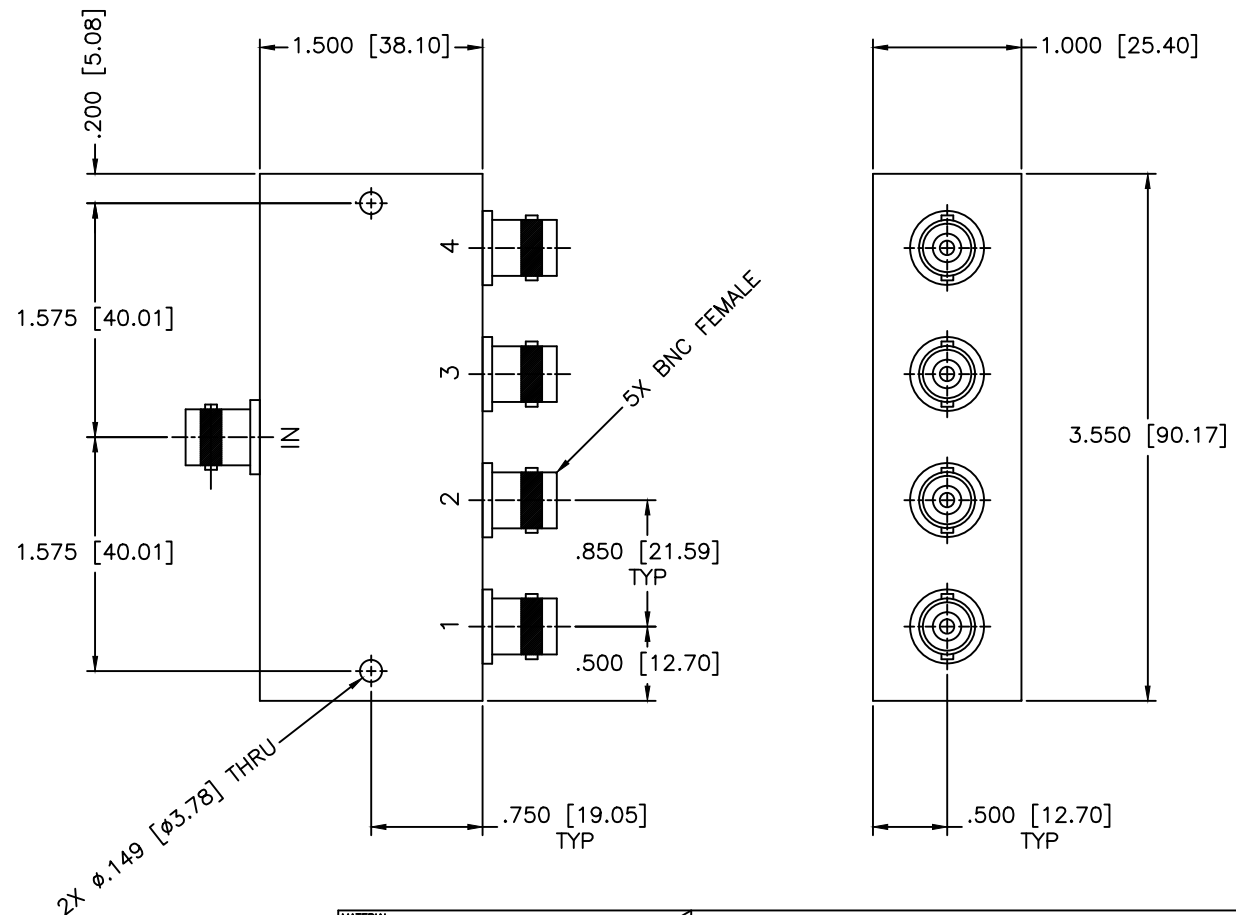

SPECIFICATIONS

Frequency Range: 1–500 MHz
 Isolation: 25dB Min.
 Insertion Loss: 1.0dB Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±2.0 Deg. Max.
 VSWR: 1.30:1 Max.

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°	DRAWING TITLE: 4-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 04-01-2016	PART NO. PL4-23/BF	
APPROVED: T. Nguyen		DATE: 04-01-2016	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 82784
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DO NOT SCALE THE DRAWING	

