


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

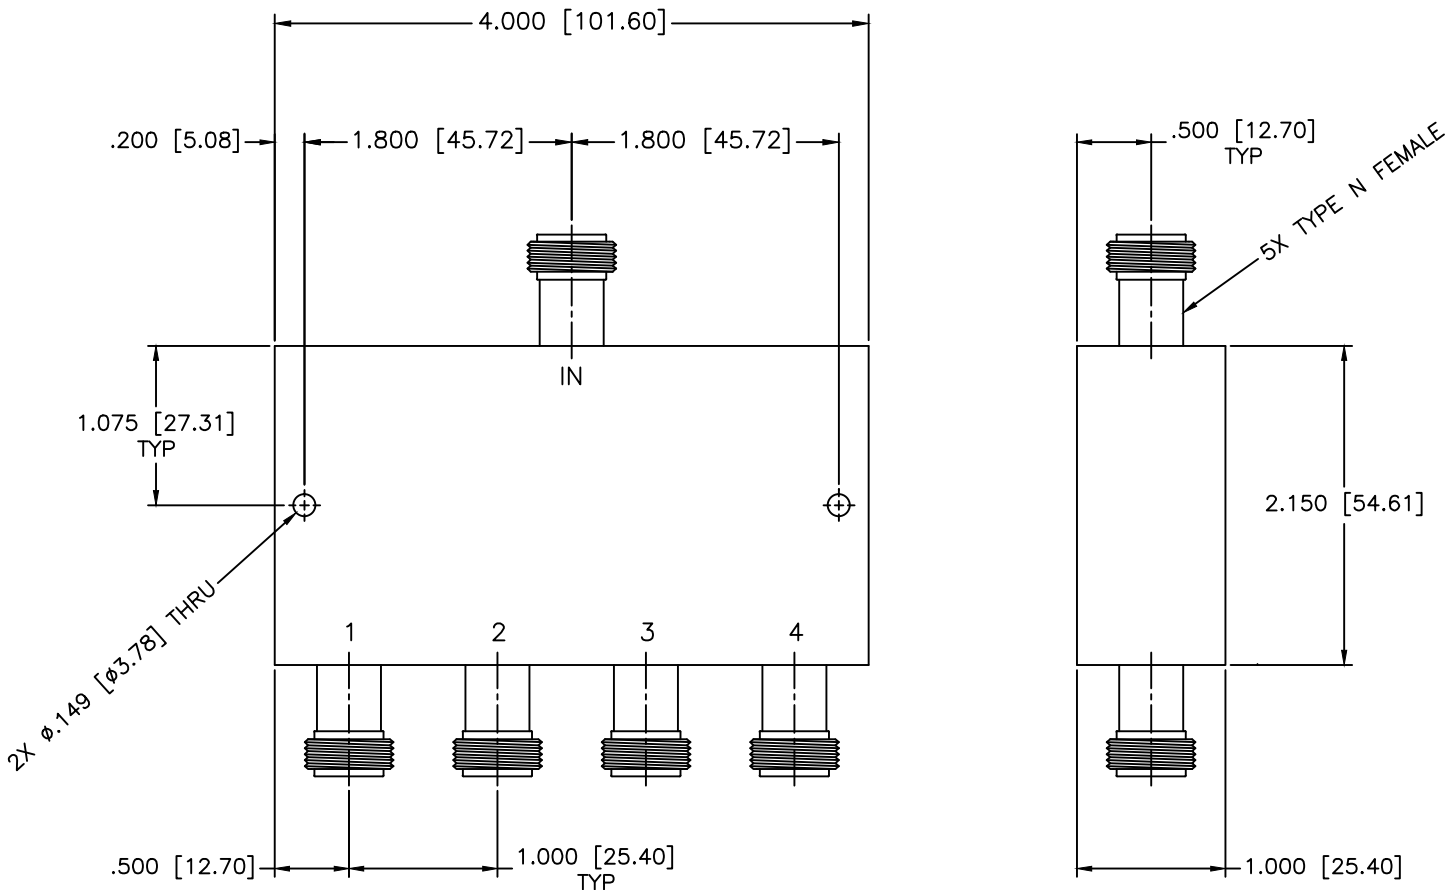

SPECIFICATIONS

Frequency Range: 0.3–60 MHz
 Isolation: 20dB Min.
 VSWR: 1.30:1 Max.
 Insertion Loss: 0.8dB Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±2 Deg. Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 07-26-2018
APPROVED: T. Nguyen	DATE: 07-26-2018

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

SCALE:	N/A		
SHEET:	N/A		
DRAWING TITLE:	4-WAY POWER DIVIDER		
PART NO.	PL4-26/NF		
CAGE CODE:	SIZE:	REV:	DWG NO.
OD2L5	N/A	N/A	86769
DO NOT SCALE THE DRAWING			

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)
 THIRD ANGLE PROJECTION