REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

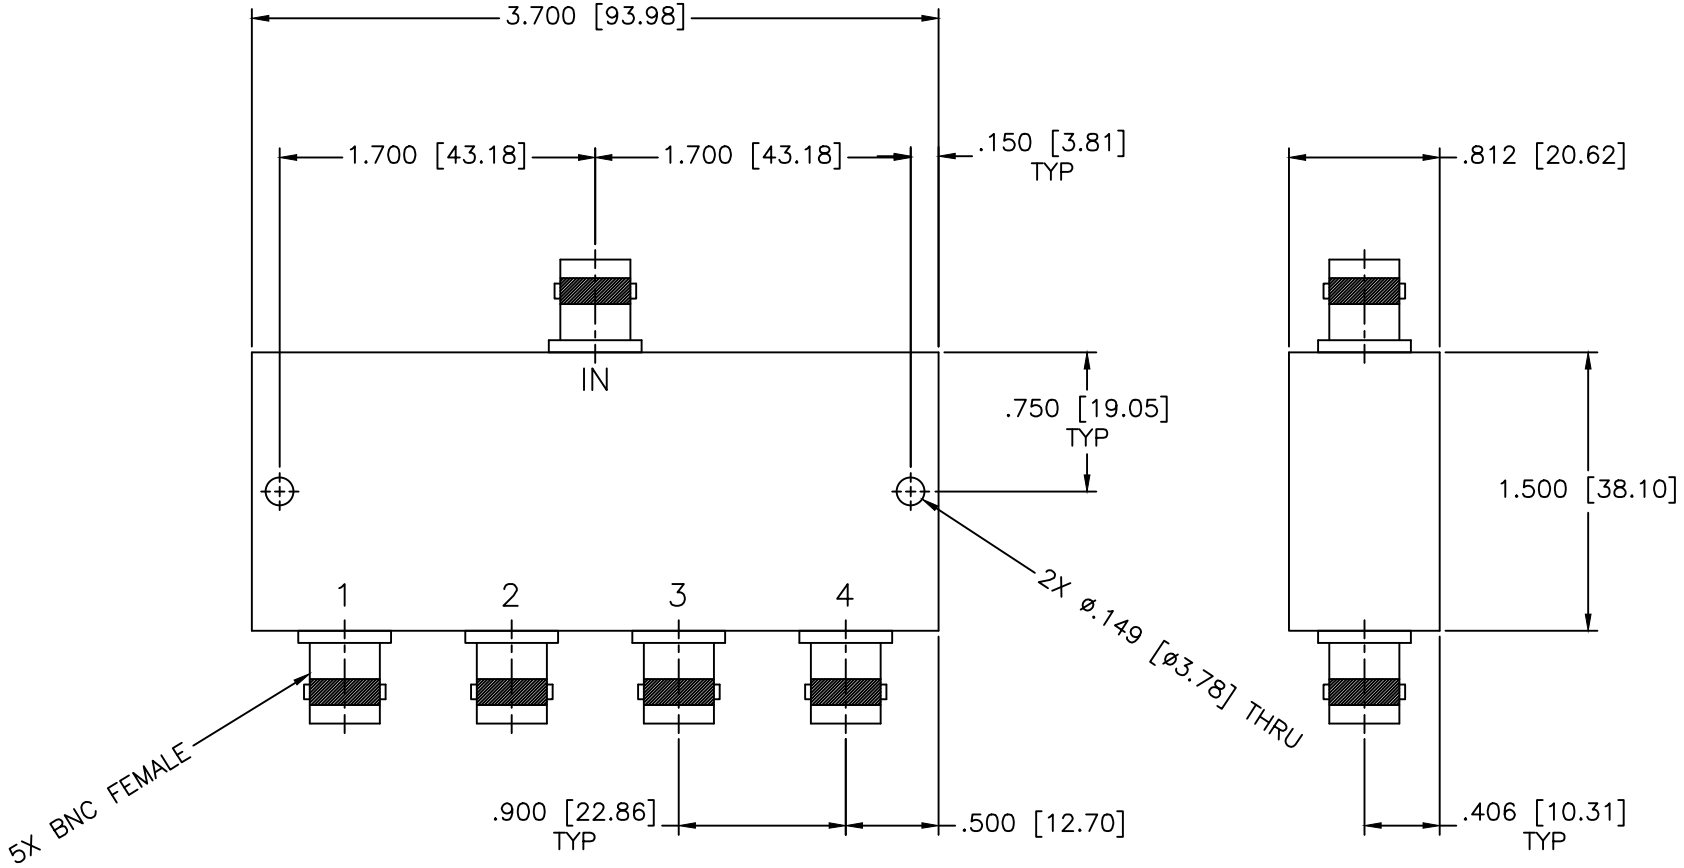

SPECIFICATIONS

Frequency Range:	3–500 MHz
Isolation:	25dB Min.
Insertion Loss:	1.0dB Max.
Amplitude Balance:	±0.2dB Max.
Phase Balance:	±2 Deg. Max.
VSWR:	1.30:1 Max.

MATERIAL:

MCLI
MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE: 4–WAY POWER DIVIDER

PART NO. PL4–2/BNC/75

DRAWN:	DATE:
Paiboon Luekhamhan	09–04–2001
APPROVED: T. Nguyen	DATE: 09–04–2001

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

CAGE CODE: 0D2L5

SIZE: A REV: N/A

DO NOT SCALE THE DRAWING

DWG NO. 81841