


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

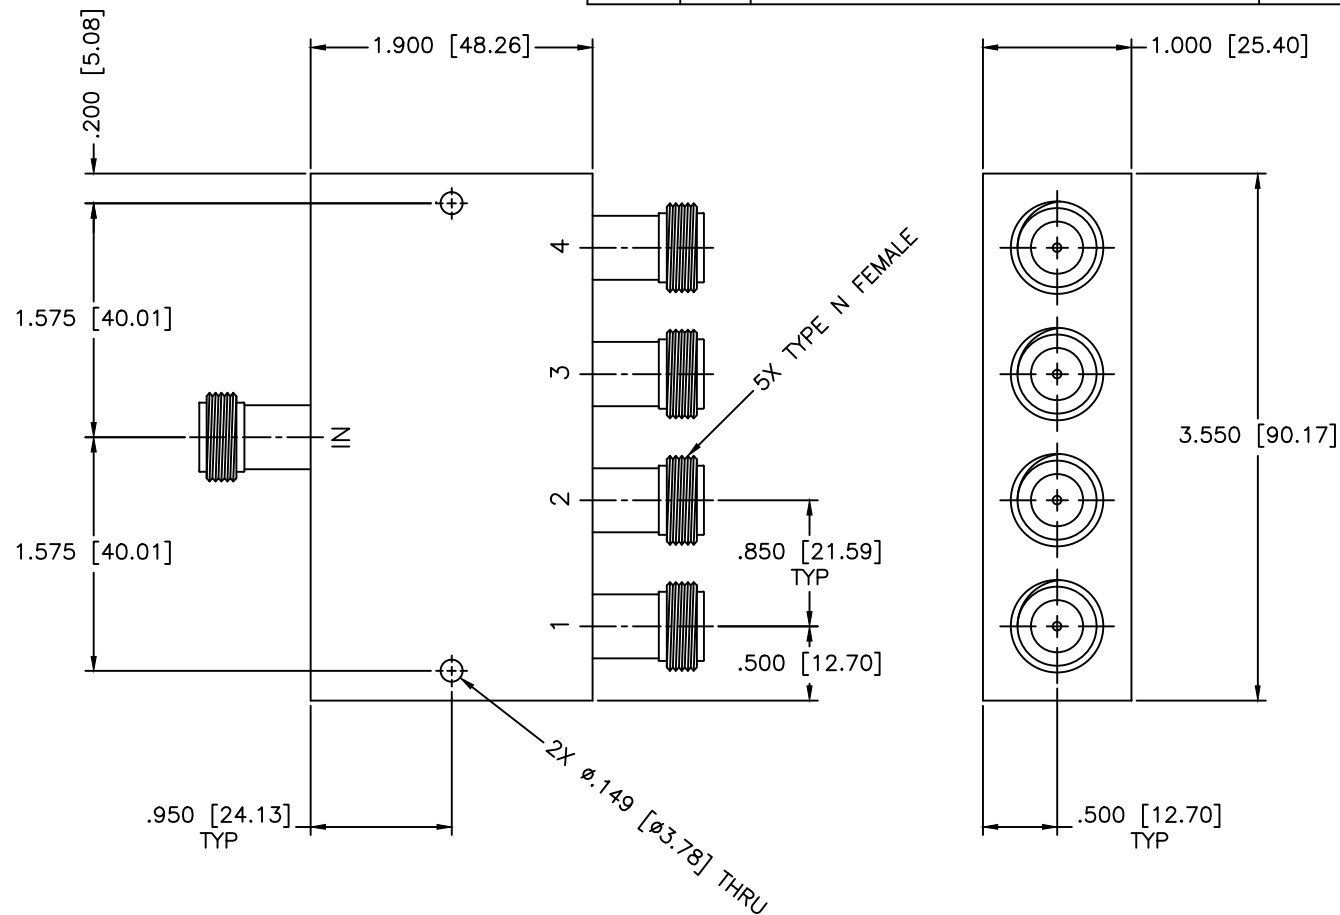

SPECIFICATIONS

Frequency Range: 20–2000 MHz
 Isolation: 18dB Min.
 VSWR: 2.00:1 Max.
 Insertion Loss: 2.6dB Max.
 Amplitude Balance: ± 0.70 dB Max.
 Phase Balance: ± 10 Deg. Max.

MATERIAL: DRAWN: Paiboon Luekhamhan APPROVED: T. Nguyen		DATE: 10-23-1997 DATE: 10-23-1997		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
						SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$				DRAWING TITLE:			
				4-WAY POWER DIVIDER			
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)				PART NO.			
				PL4-9/NF			
THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5		SIZE: N/A DO NOT SCALE THE DRAWING		REV: N/A DWG NO. 80163	