


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

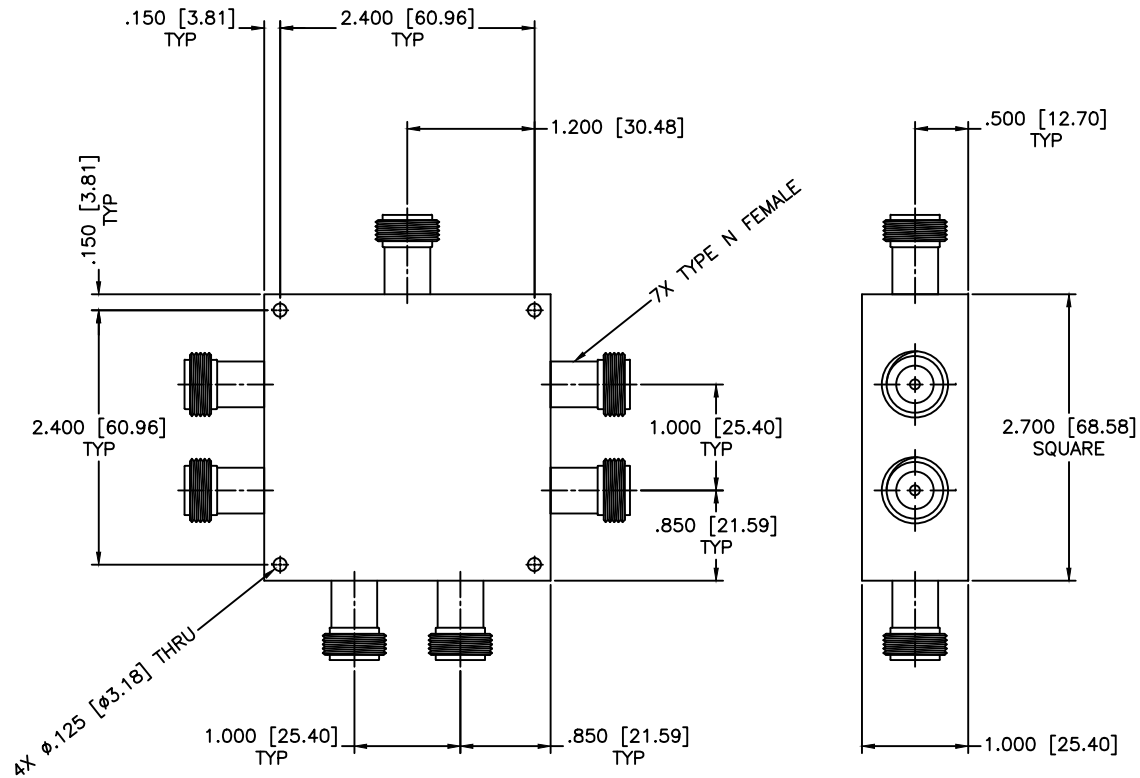

SPECIFICATIONS

Frequency Range: 5–100 MHz
 Isolation: 24dB Min.
 Insertion Loss: 1.0dB Max.
 Amplitude Balance: ± 0.3 dB Max.
 Phase Balance: ± 2 Deg. Max.
 VSWR: 1.30:1 Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$			DRAWING TITLE: 6-WAY POWER DIVIDER		SHEET: N/A
DRAWING: Paiboon Luekhamhan		DATE: 10-30-1997		PART NO.: PL6-1/NF	
APPROVED: T. Nguyen		DATE: 10-30-1997		CAGE CODE: OD2L5	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		SIZE: N/A	REV: N/A
				DWG NO.: 80206	
				DO NOT SCALE THE DRAWING	