


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

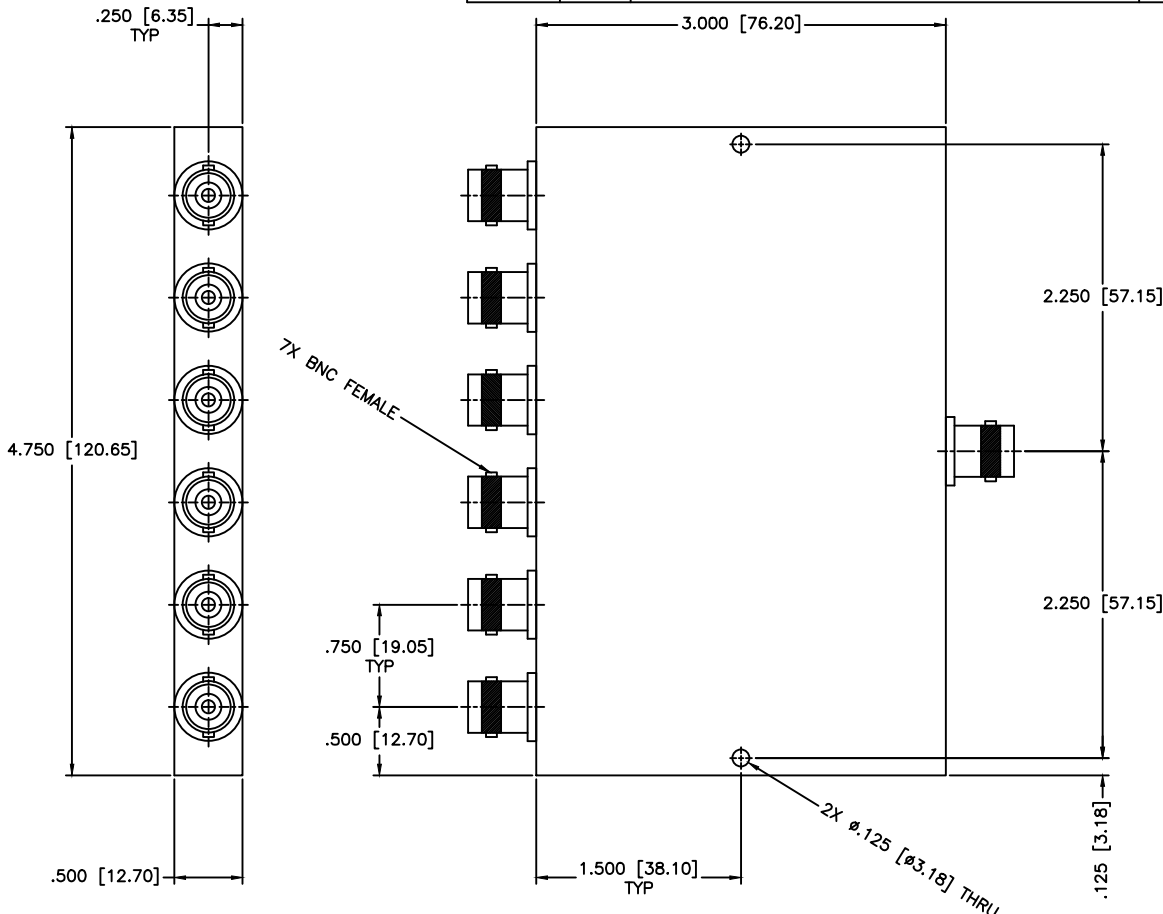

7X BNC FEMALE

2X  $\phi$ .125 [ $\phi$ 3.18] THRU

**SPECIFICATIONS**

Frequency Range: 10–500 MHz  
 Isolation: 22dB Min.  
 Insertion Loss: 2.0dB Max.  
 Amplitude Balance:  $\pm 0.40$ dB Max.  
 Phase Balance:  $\pm 5$  Deg. Max.  
 VSWR: 1.50:1 Max.  
 Power: 1 Watts

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
				UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:  6-WAY POWER DIVIDER		SHEET:
DRAWN: Paiboon Luekhamhan		DATE: 10-13-1998		PART NO.  PL6-2/BF				
APPROVED: T. Nguyen		DATE: 10-13-1998		CAGE CODE: OD2L5		SIZE: A	REV: A	DWG NO. 81156
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING				