REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

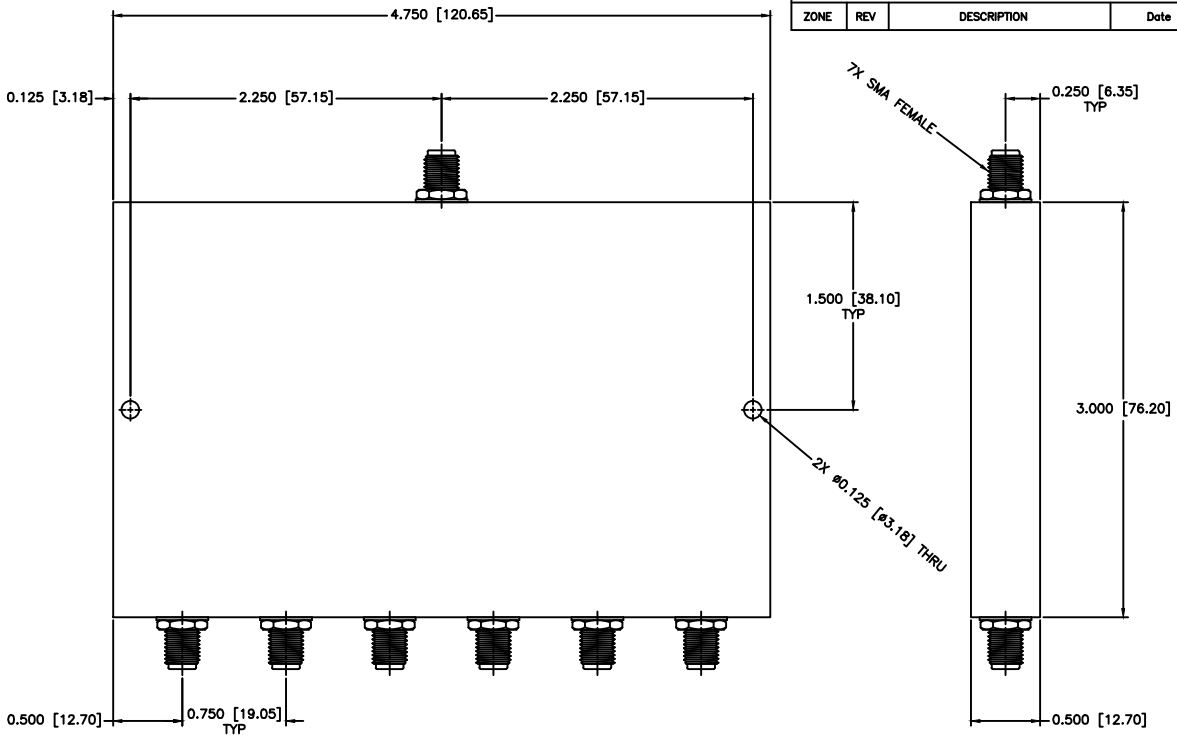

SPECIFICATIONS

Frequency Range:	10–1000 MHz
Isolation:	22dB Min.
Insertion Loss:	2.5dB Max.
Amplitude Balance:	±0.4dB Max.
Phase Balance:	±6dB Max.
VSWR:	1.50:1 Max.
Power:	1 Watt Max.

MATERIAL:

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344–6254 FAX: (727) 381–6116
http://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE: 6-WAY POWER DIVIDERS

PART NO. PL6–4/S1

DRAWN: Paiboon Luekhamhan — DATE: 04–19–1999

APPROVED: T. Nguyen — DATE: 04–19–1999

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

CAGE CODE: OD2L5

SIZE: N/A — REV: N/A

DO NOT SCALE THE DRAWING

DWG NO. 82373