


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

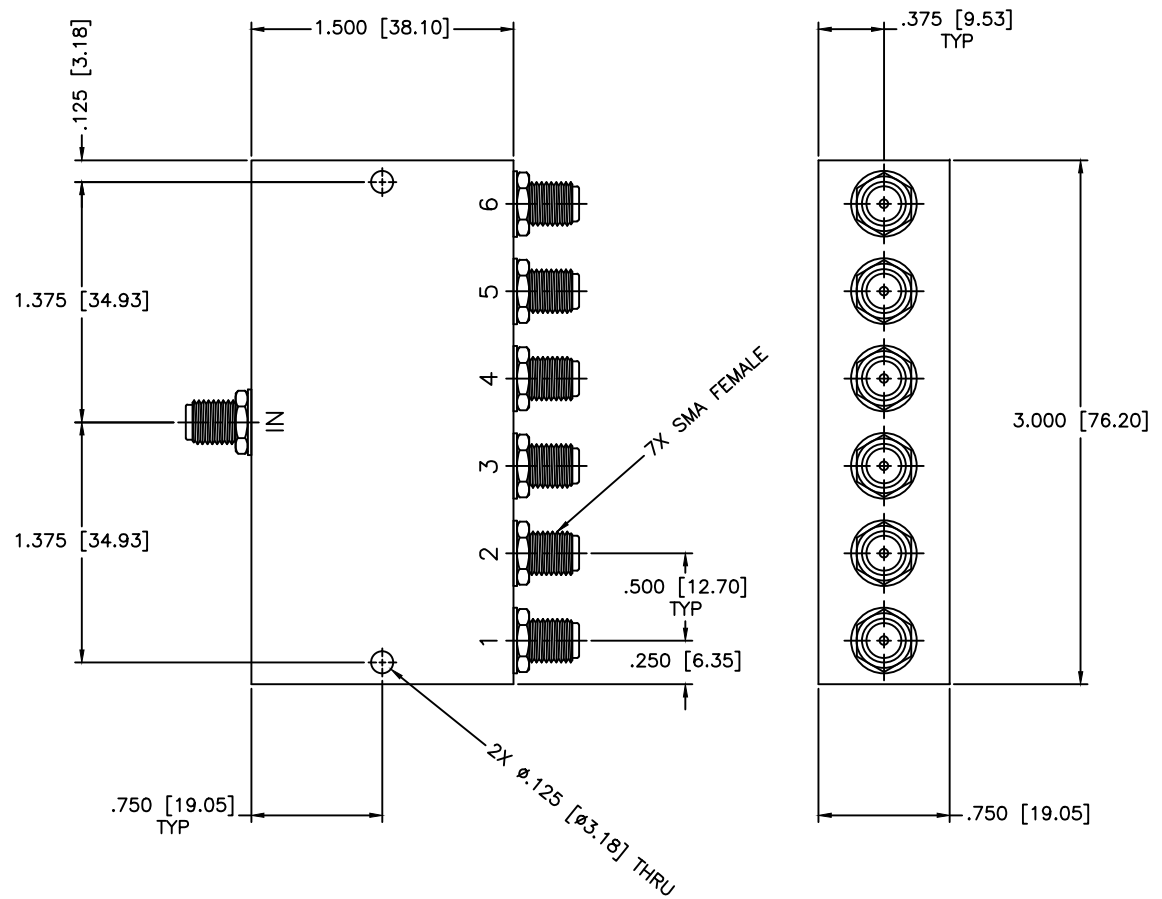

SPECIFICATIONS

- Frequency Range: 500–1000 MHz
- Isolation: 18dB Min.
- Insertion Loss: 2.8dB Max.
- Amplitude Balance: ±0.4dB Max.
- Phase Balance: ±10 Deg. Max.
- VSWR: 1.60:1 Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 10-30-1997	DRAWING TITLE: 6-WAY POWER DIVIDERS		
APPROVED: T. Nguyen		DATE: 10-30-1997	PART NO. PL6-5		
THIRD ANGLE PROJECTION		CAGE CODE: 0D2L5	SIZE: N/A	REV: N/A	DWG NO. 80217
		DO NOT SCALE THE DRAWING			