


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

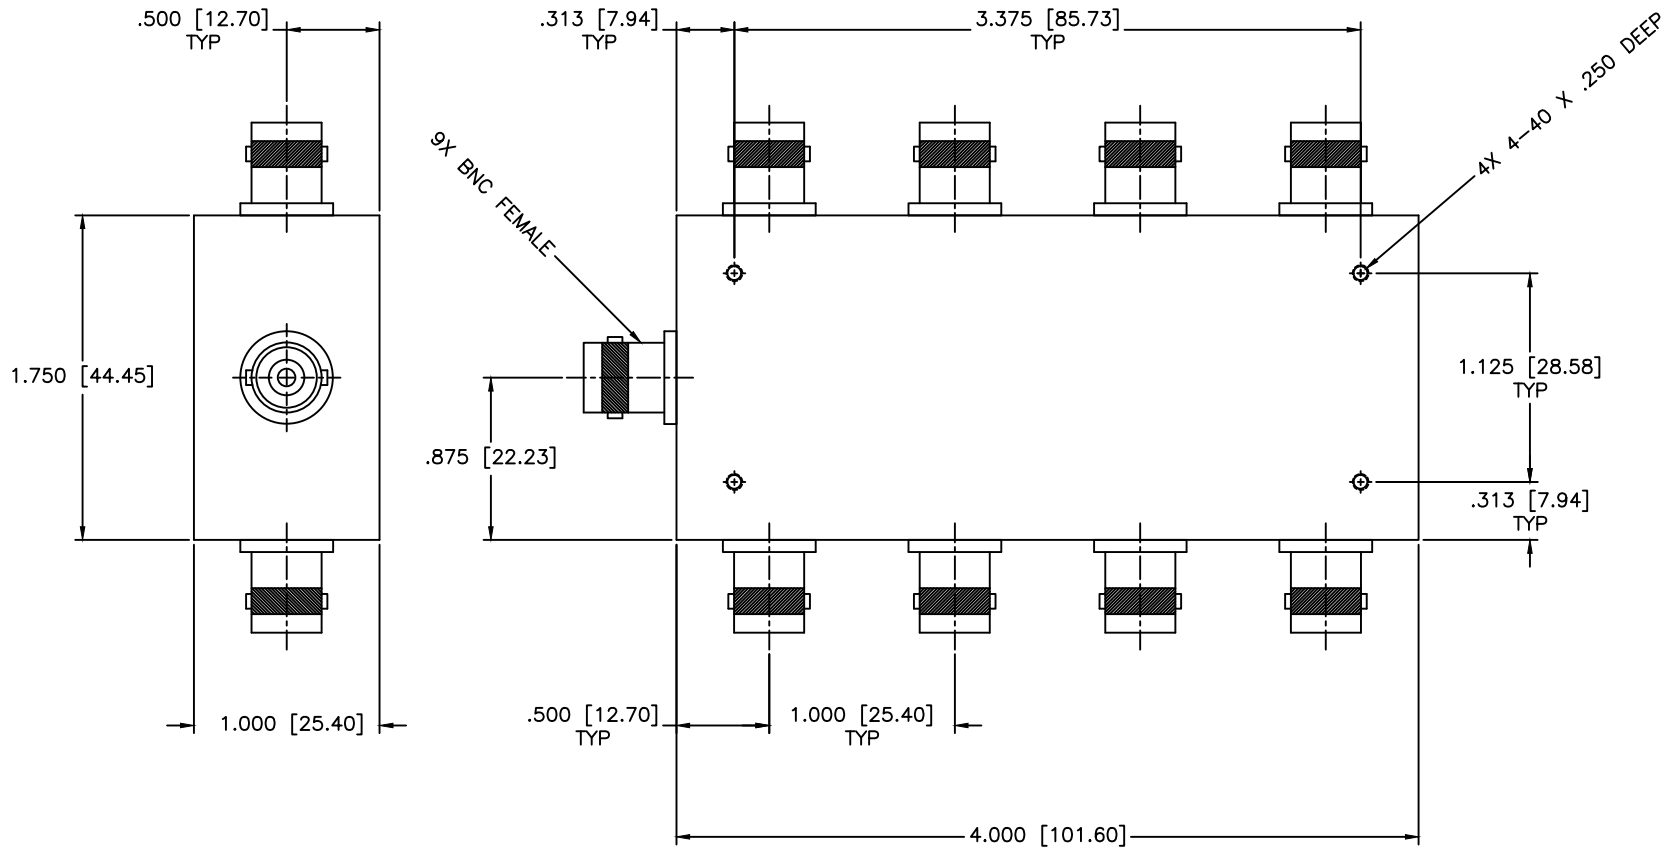

SPECIFICATIONS

Frequency Range: 5–1000 MHz
 Isolation: 15dB Min.
 VSWR: 1.35:1 Max.
 Insertion Loss: 3.0dB Max.
 Amplitude Balance: ± 1.3 dB Max.
 Phase Balance: ± 15 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE:		SHEET:
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.		8-WAY POWER DIVIDER	
DRAWN:		DATE:	PART NO.			
Paiboon Luekhamhan		09-02-1998	PL8-19/BF			
APPROVED:		DATE:	CAGE CODE:	SIZE:	REV:	DWG NO.
T. Nguyen		09-02-1998	OD2L5	A	N/A	81134
		THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING			