


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

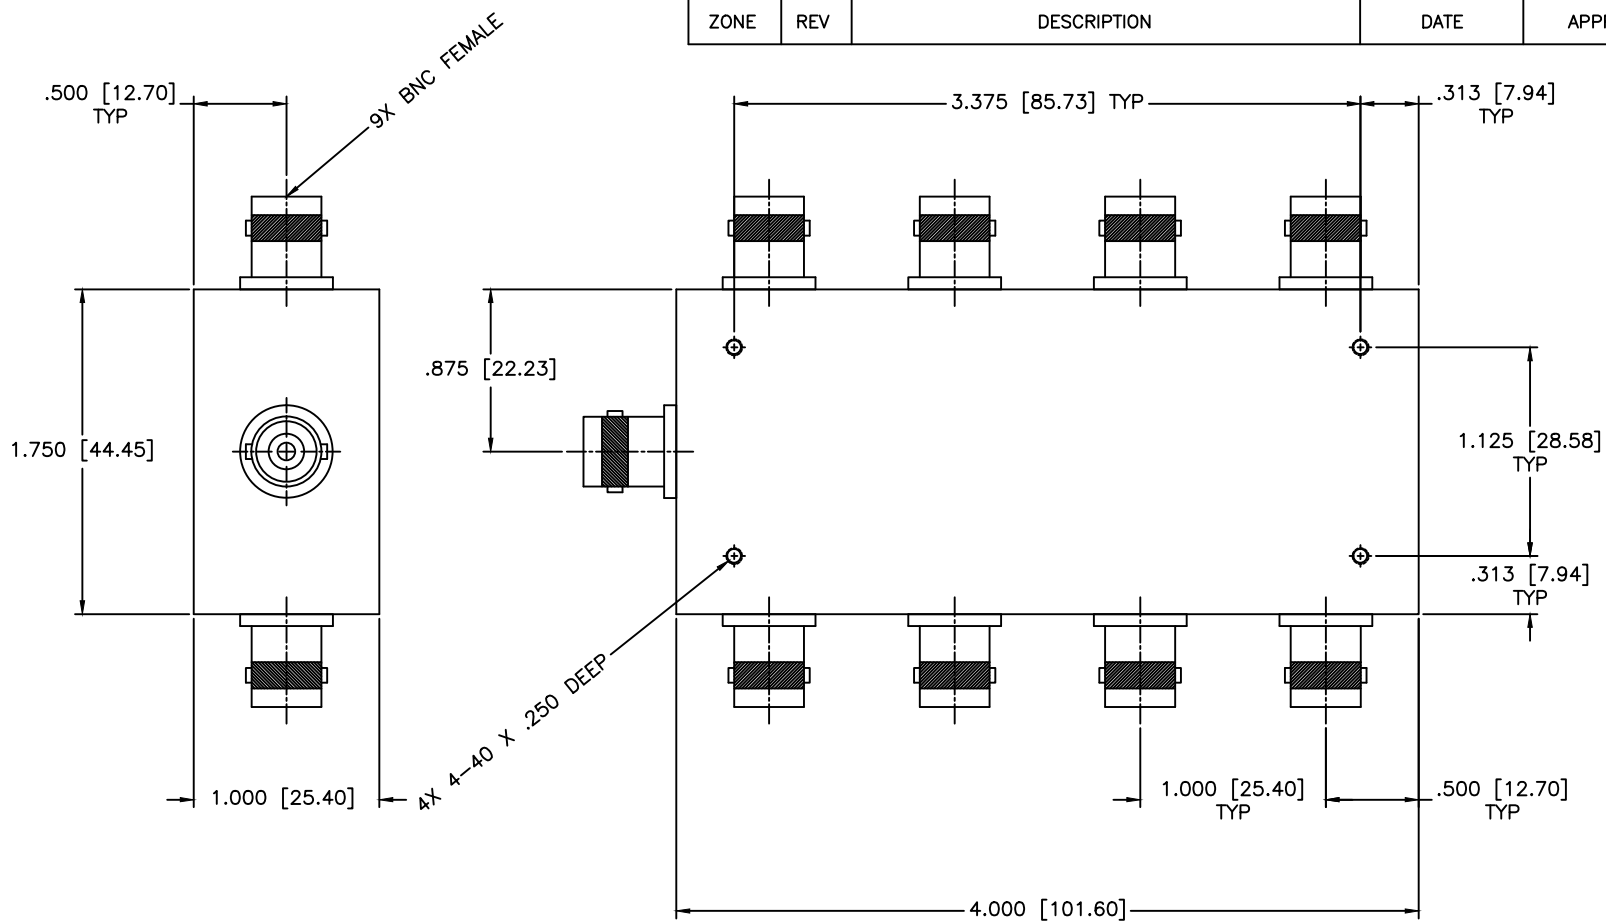

**SPECIFICATIONS**

Frequency Range: 0.1–100 MHz  
 Isolation: 23 dB Min.  
 VSWR: 1.40:1 Max.  
 Insertion Loss: 1.6 dB Max.  
 Amplitude Balance:  $\pm 0.6$  dB Max.  
 Phase Balance:  $\pm 3$  Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
					SHEET:	N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			8-WAY LUMPED ELEMENT POWER DIVIDER
DRAWN:		DATE:		PART NO.			PL8-1/BNC
Paiboon Luekhamhan		04-03-2006		CAGE CODE:			OD2L5
APPROVED:		DATE:		SIZE:		REV:	DWG NO.
T. Nguyen		04-03-2006		A		N/A	80565
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING			
		THIRD ANGLE PROJECTION					