


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

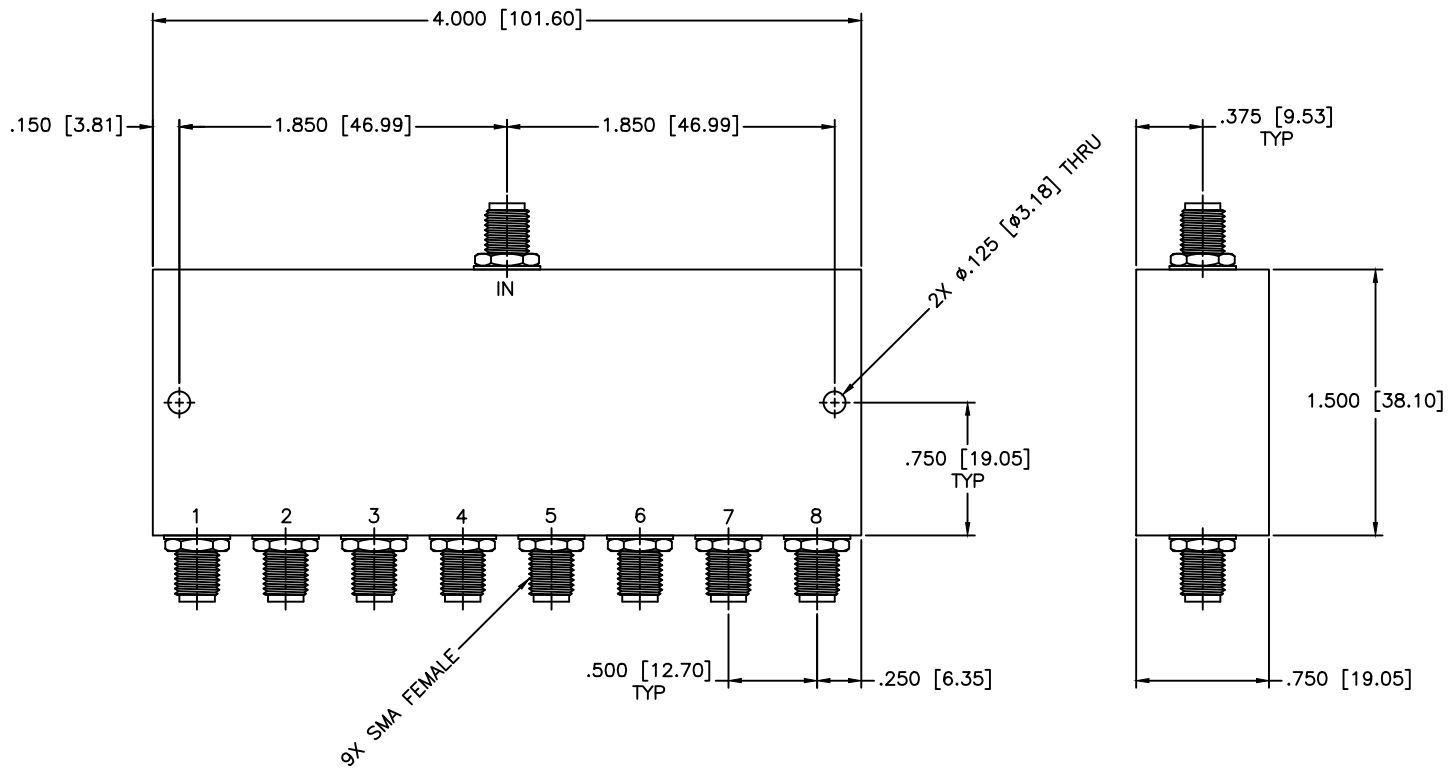

SPECIFICATIONS

Frequency Range: 0.5–100 MHz
 Insertion Loss: 1.1dB Max.
 Isolation: 25dB Min.
 VSWR: 1.30:1 Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±2 Deg. Max.
 Power: 1 Watt Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 8-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 11-06-1997		PART NO.: PL8-11 CAGE CODE: OD2L5 SIZE: A REV: N/A DWG. NO.: 80297
APPROVED: T. Nguyen		DATE: 11-06-1997		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING