


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

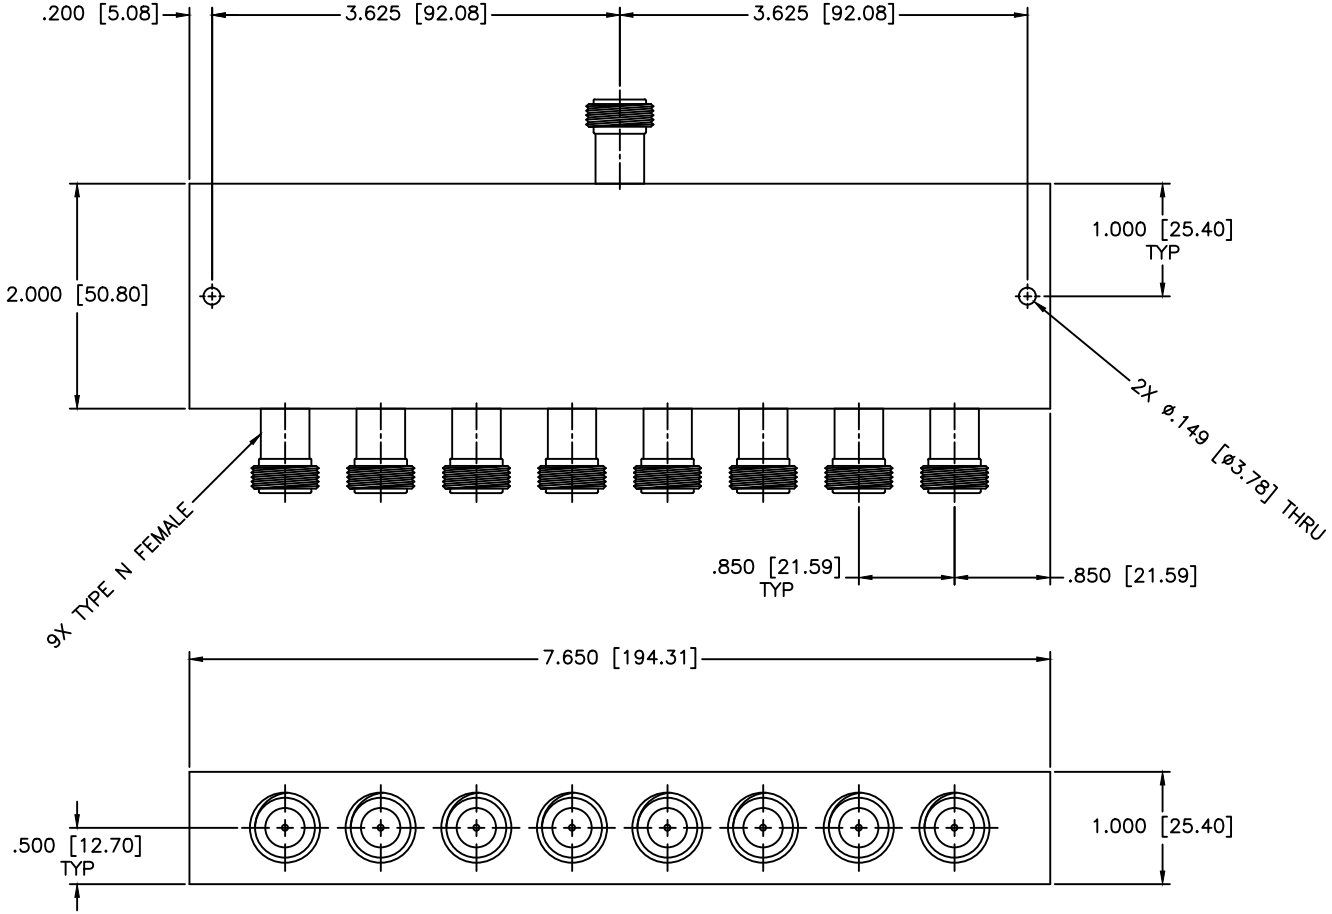

**SPECIFICATIONS**

- Frequency Range: 0.1-100 MHz
- Insertion Loss: 1.6dB Max.
- Isolation: 23dB Min.
- VSWR: 1.40:1 Max.
- Amplitude Balance:  $\pm 0.6$ dB Max.
- Phase Balance:  $\pm 3$  Deg. Max.

MATERIAL: _____	<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8118 http://www.MCLI.com	SCALE: N/A
		SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: <b>8-WAY LUMPED ELEMENT POWER DIVIDER</b>
DRAWN: Paiboon Luekhamhan	DATE: 11-05-1997	PART NO.: <b>PL8-1/NFI</b>
APPROVED: T. Nguyen	DATE: 11-05-1997	CAGE CODE: OD2L5
THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND SHALL NOT BE DISCLOSED OUTSIDE THESE LABORATORIES OR SELLER.		SIZE: N/A      REV: N/A      DWG NO.: 80279
		DO NOT SCALE THE DRAWING