| REVISIONS | | | | |
|---|---|---|---|---|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |

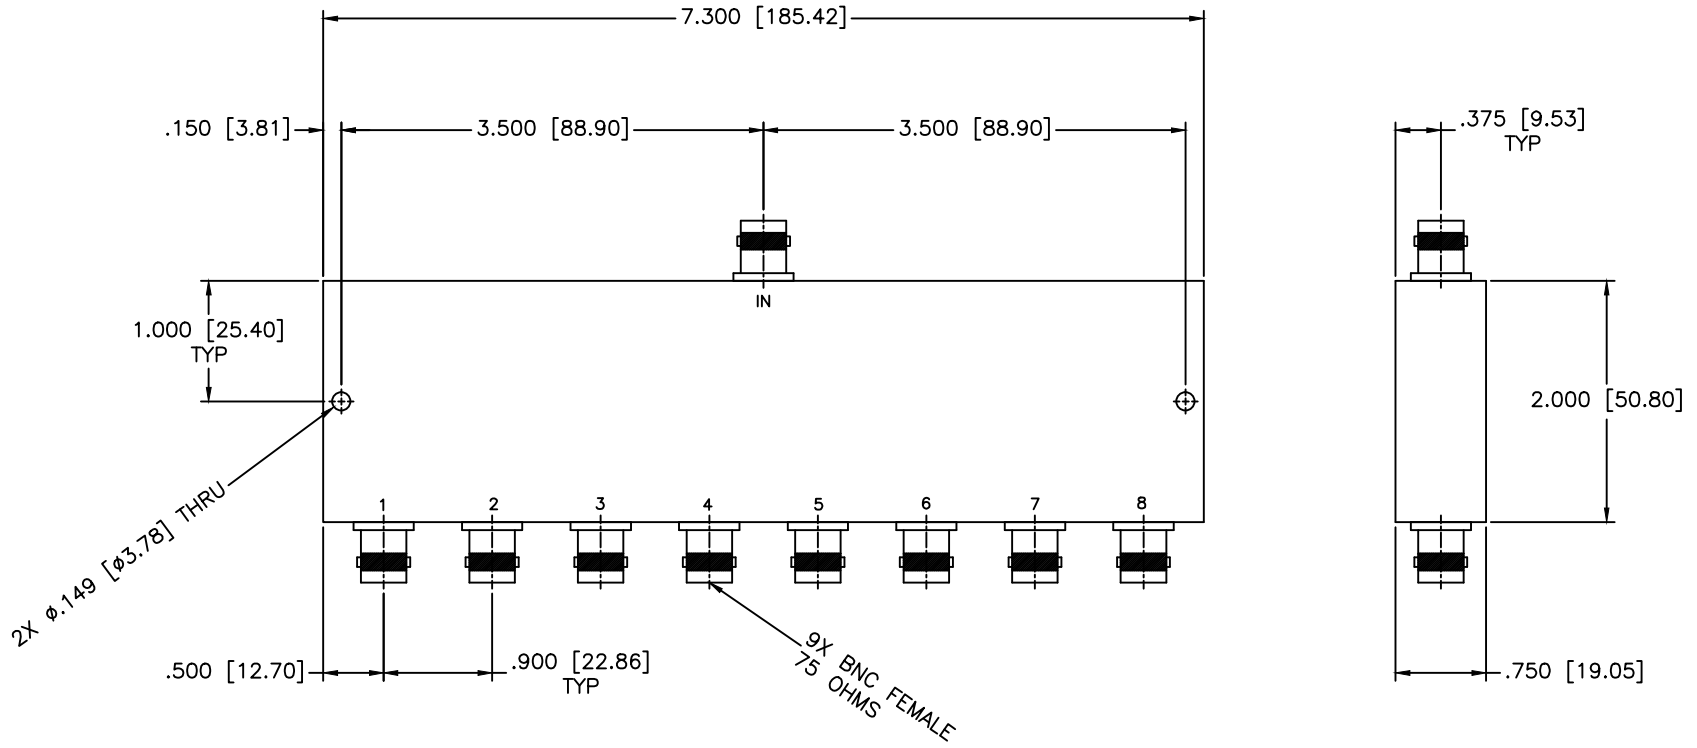


SPECIFICATIONS

Frequency Range: 5–500 MHz
Isolation: 25dB Min.
VSWR: 1.30:1 Max.
Insertion Loss: 1.4dB Max.
Amplitude Balance: ±0.3dB Max.
Phase Balance: ±4 Deg. Max.
Power: 1 Watt Max.
Impedance: 75 Ohms

MATERIAL:

MCLI
MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-8254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE: 8-WAY LUMPED ELEMENT POWER DIVIDER

PART NO. PL8-2-75/BFI

| DRAWN: | DATE: |
|---|---|
| Paiboon Luekhamhan | 09-04-2001 |
| APPROVED: T. Nguyen | DATE: 09-04-2001 |

CAGE CODE: 0D2L5
SIZE: N/A
REV: N/A
DWG NO. 81847
DO NOT SCALE THE DRAWING