


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

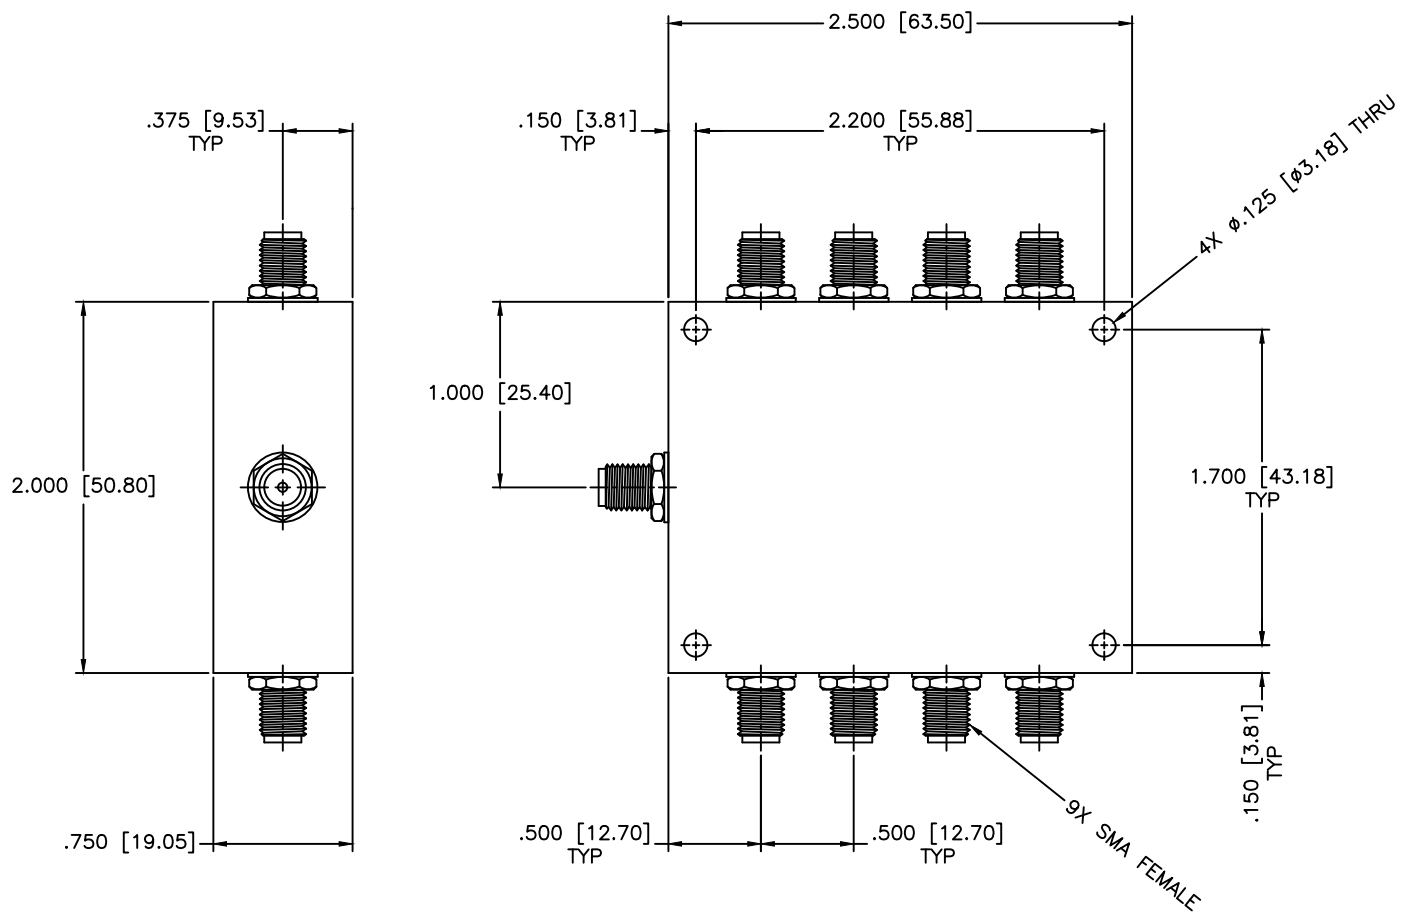

SPECIFICATIONS

- Frequency Range: 5–500 MHz
- Isolation: 25dB Min.
- VSWR: 1.30:1 Max.
- Insertion Loss: 1.4dB Max.
- Amplitude Balance: ±0.3dB Max.
- Phase Balance: ±4 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO.: PL8-2		
DATE: 11-08-1997		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		SIZE: N/A		
DATE: 11-08-1997		REV: N/A		
THIRD ANGLE PROJECTION		DWG NO.: 80288		
		DO NOT SCALE THE DRAWING		