


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

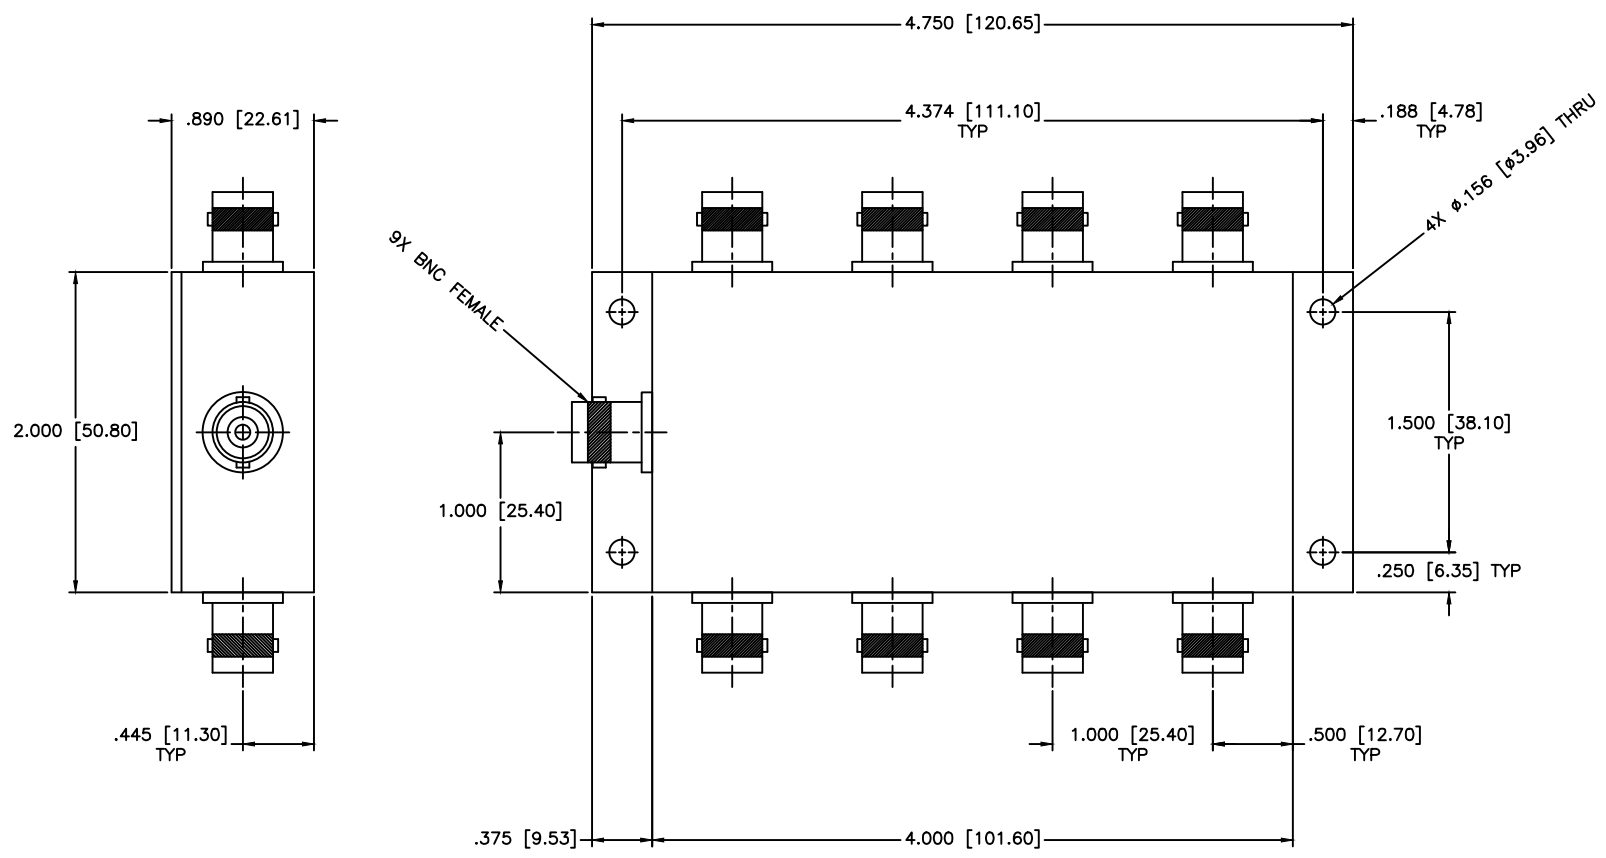

SPECIFICATIONS

FREQUENCY RANGE:	1-500 MHz		
ISOLATION Typ/Min. (dB):	LB	MB	UB
INSERTION LOSS Typ/Max. (dB):	25/20	30/20	30/20
PHASE BALANCE (Max.):	1.0/1.8	1.8/2.0	1.8/2.7
AMPLITUDE BALANCE (Max.):	3 Deg.	6 Deg.	10 Deg.
	0.2dB	0.3dB	0.5dB

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	09-02-1998
APPROVED:	DATE:
T. Nguyen	09-02-1998



MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE:
8-WAY POWER DIVIDER

PART NO.
PL8-2/BF

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)
THIRD ANGLE PROJECTION

CAGE CODE:
OD2L5

SIZE: N/A
REV: N/A
DO NOT SCALE THE DRAWING

DWG NO.
81170