


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

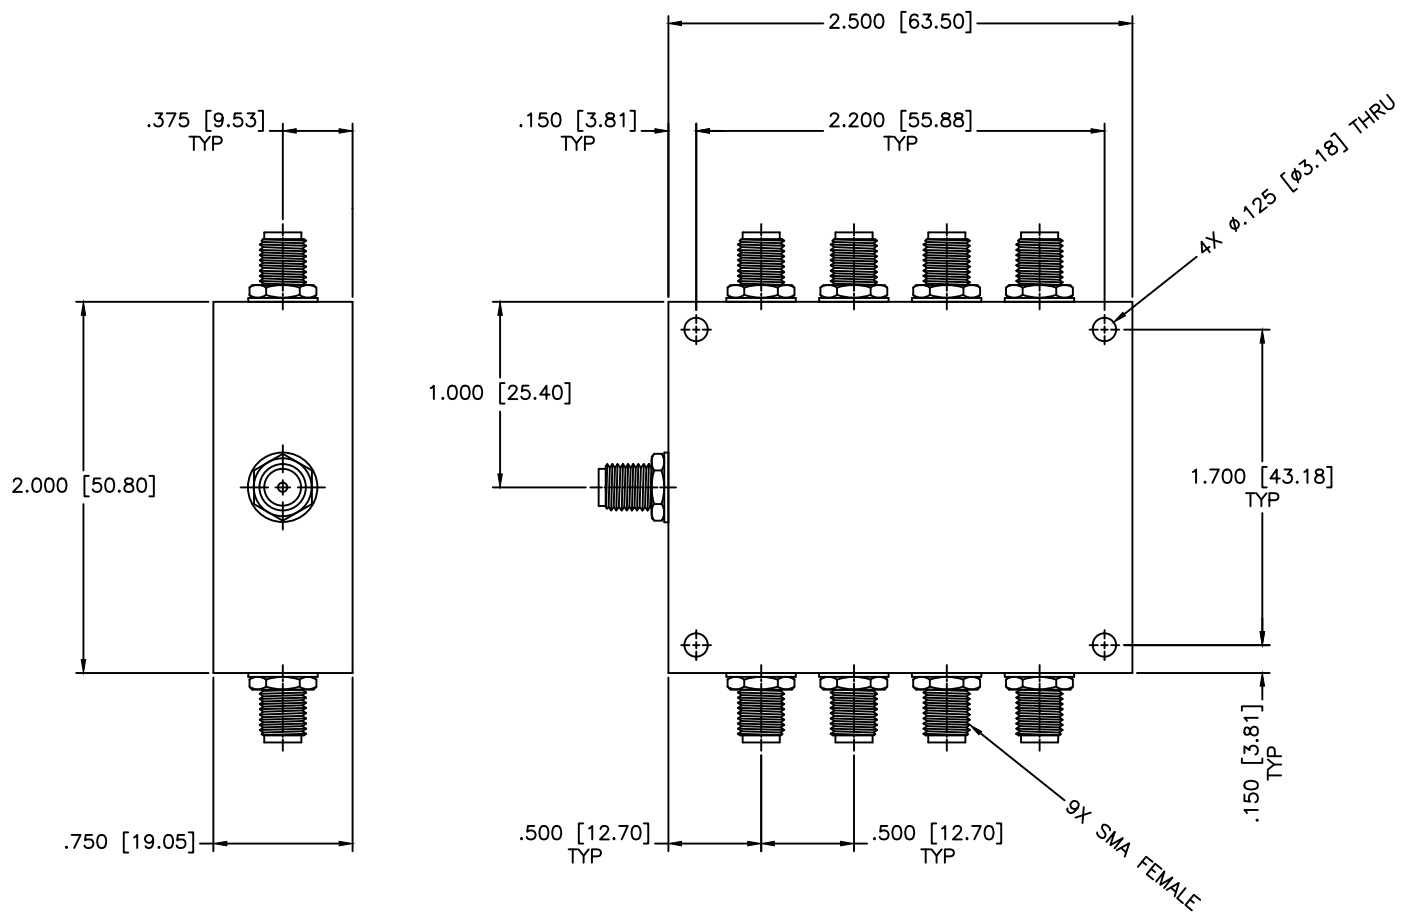

SPECIFICATIONS

Frequency Range: 200–1000 MHz
 Isolation: 25dB Min.
 VSWR: 1.30:1 Max.
 Insertion Loss: 1.6dB Max.
 Amplitude Balance: ±0.5dB Max.
 Phase Balance: ±7 Deg. Max.
 Power: 1 Watt Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		PART NO.: PL8-3	
DATE: 01-06-1997		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		SIZE: N/A	REV: N/A
DATE: 01-06-1997		DWG NO.: 80289	
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	