


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

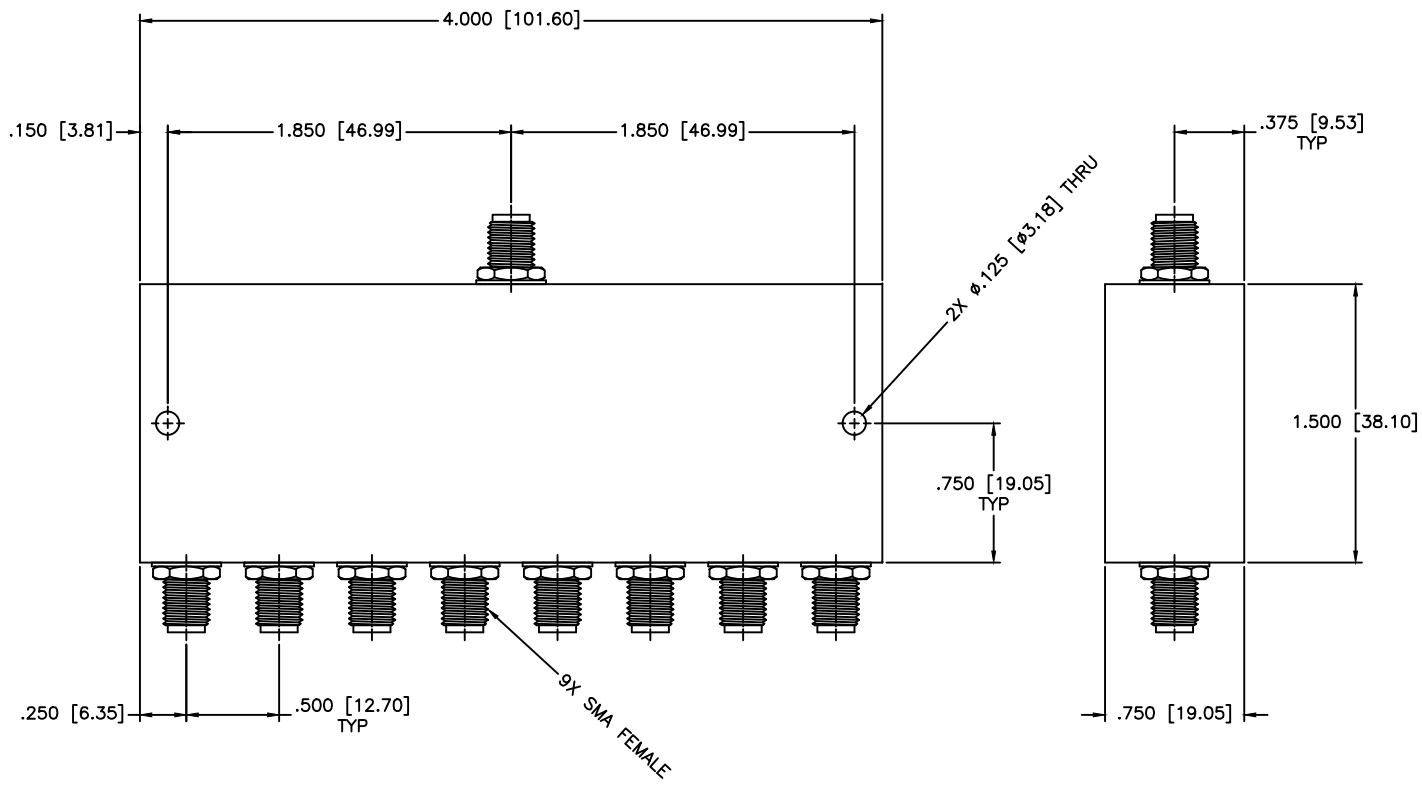

SPECIFICATIONS

Frequency Range: 200–1000 MHz
 Insertion Loss: 1.6dB Max.
 Isolation: 25dB Min.
 VSWR: 1.30:1 Max.
 Amplitude Balance: ±0.5dB Max.
 Phase Balance: ±7 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A	
DRAWING TITLE:		8-WAY LUMPED ELEMENT POWER DIVIDER				
PART NO.:		PL8-31				
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DRAWN: Paiboon Luekhamhan	DATE: 11-06-1997	CAGE CODE:	SIZE: A REV: N/A	DWG NO.:	
APPROVED: T. Nguyen	DATE: 11-06-1997		OD2L5	DO NOT SCALE THE DRAWING		80299