


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

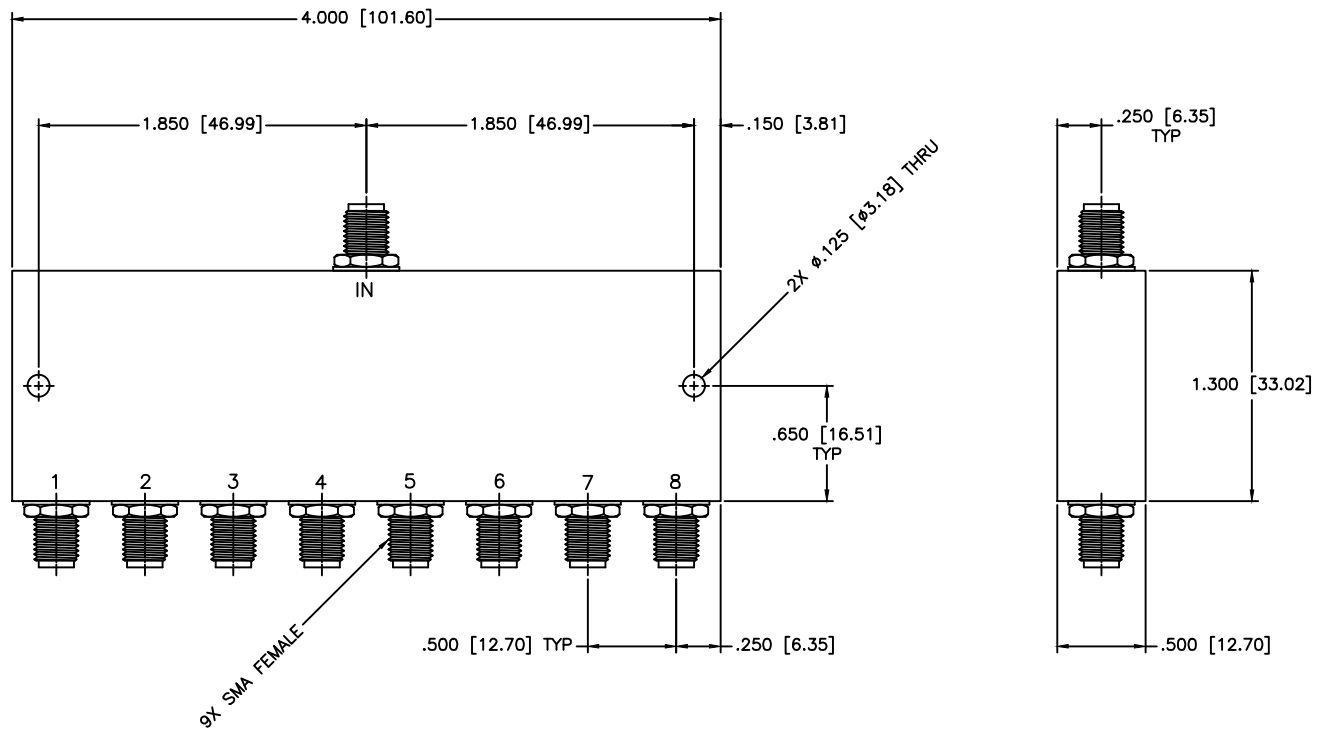

**SPECIFICATIONS**

Frequency Range: 1–200 MHz  
 Isolation: 20dB Min.  
 VSWR: 1.50:1 Max.  
 Insertion Loss: 1.7dB Max.  
 Amplitude Balance: ±0.6dB Max.  
 Phase Balance: ±5 Deg. Max.  
 Power: 1 Watt Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°			DRAWING TITLE: <b>8-WAY POWER DIVIDER</b>		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 11-30-2011		PART NO. <b>PL8-4I</b>	
APPROVED: T. Nguyen		DATE: 11-30-2011		CAGE CODE: OD2L5	SIZE: A REV: A DWG NO.: 85946
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)				DO NOT SCALE THE DRAWING	