


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

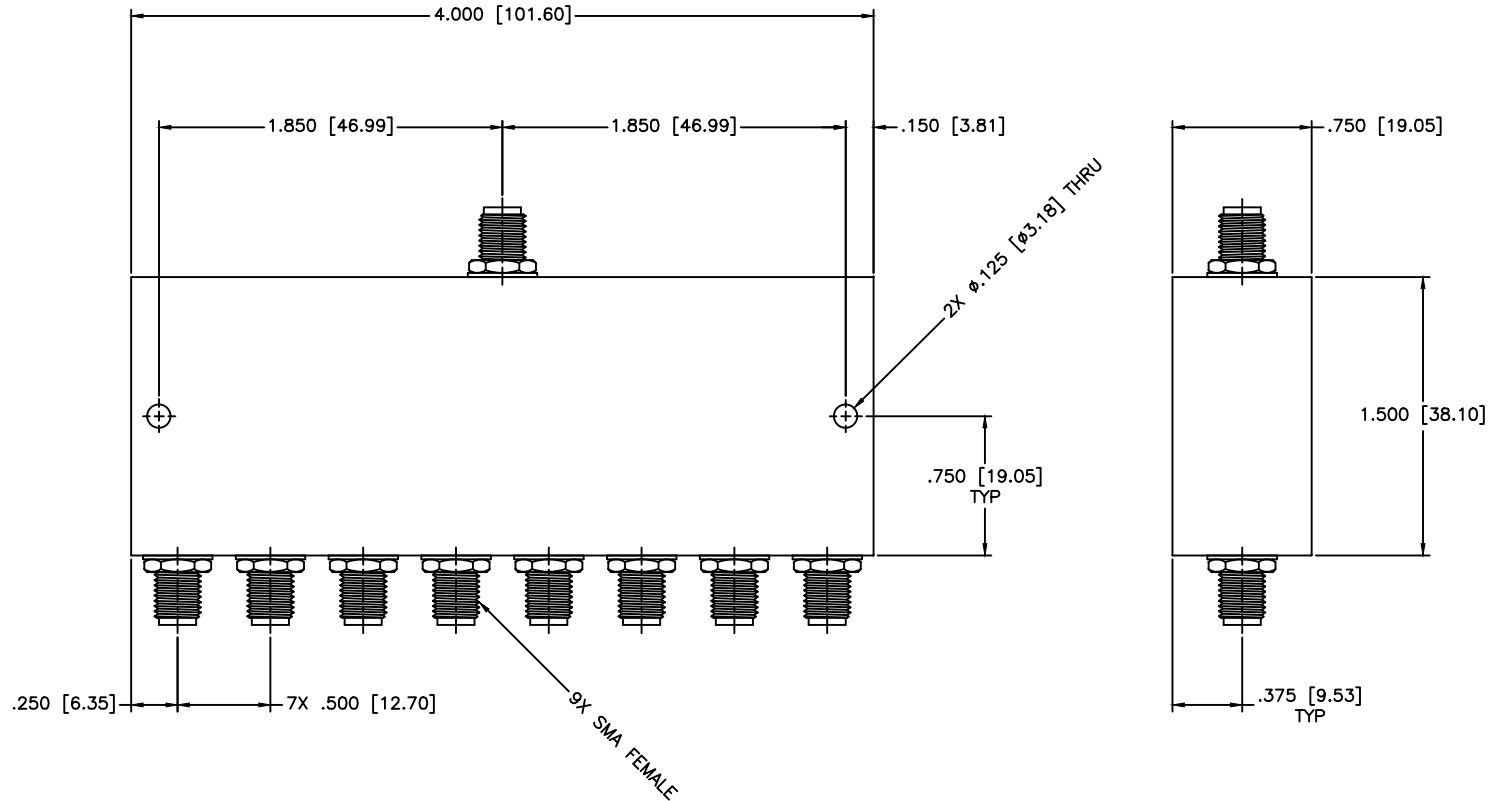

**SPECIFICATIONS**

Frequency Range: 1–200 MHz  
 Insertion Loss: 1.7dB Max.  
 Isolation: 20dB Min.  
 VSWR: 1.50:1 Max.  
 Amplitude Balance: ±0.6dB Max.  
 Phase Balance: ±5 Deg. Max.  
 Power: 1 Watt Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWN:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DRAWING TITLE:		
DATE:		THIRD ANGLE PROJECTION		8-WAY LUMPED ELEMENT POWER DIVIDER		
APPROVED:				PART NO.:		
DATE:		CAGE CODE:		PL8-4L		
T. Nguyen		OD2L5		SIZE:	A	REV:
11-06-1997		DO NOT SCALE THE DRAWING		N/A		DWG NO.
						80300