
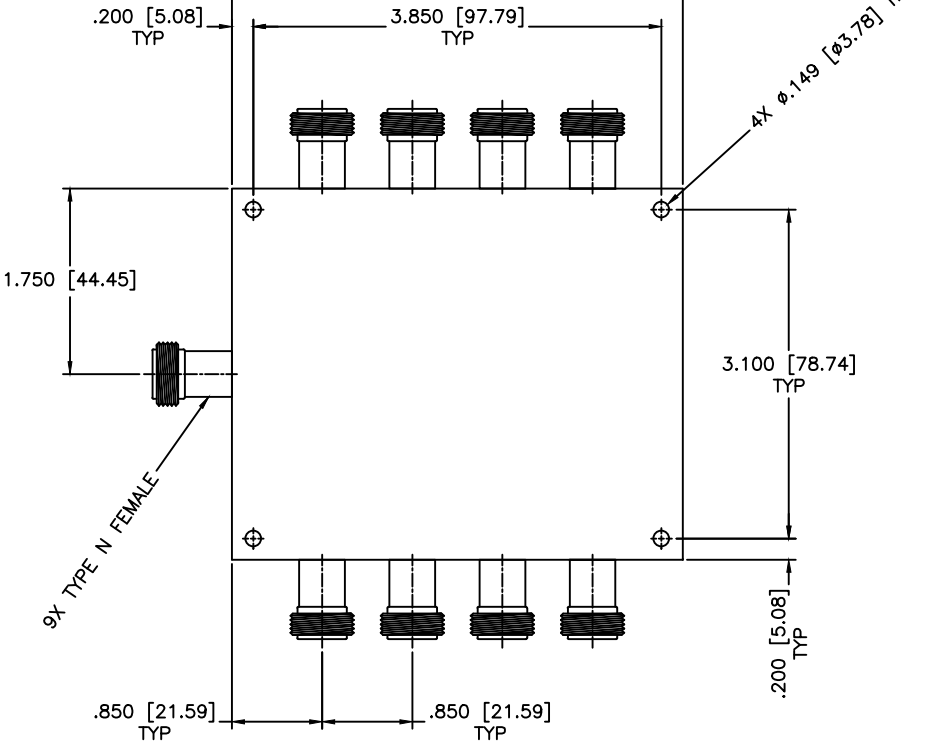


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

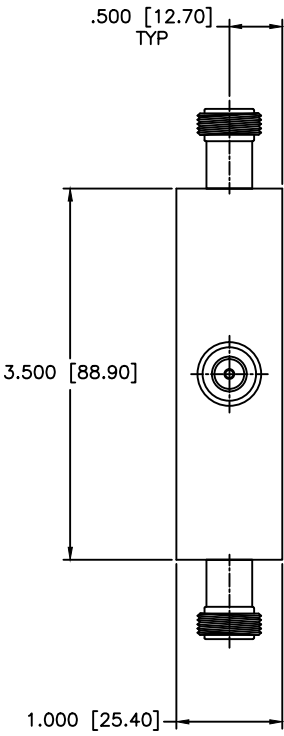

**SPECIFICATIONS**

Frequency Range: 1–200 MHz  
 Insertion Loss: 1.7dB Max.  
 Isolation: 20dB Min.  
 VSWR: 1.50:1 Max.  
 Amplitude Balance: ±0.6dB Max.  
 Phase Balance: ±5 Deg. Max.

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-0110 http://www.mcli.com		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.01 ± 0.005 ANGLE: ± 1/2°		DRAWING TITLE:		8-WAY LUMPED ELEMENT POWER DIVIDER		SHEET: N/A
DRAWN:		DATE:		PART NO.:		
Pai boon Luengkhaman		11-05-1997		PLB-4/NF		
APPROVED:		DATE:		CAGE CODE:		
T. Nguyen		11-05-1997		OD2L5		
				SIZE: N/A		
				REV: N/A		DWG NO.:
				DO NOT SCALE THE DRAWING		80235