


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

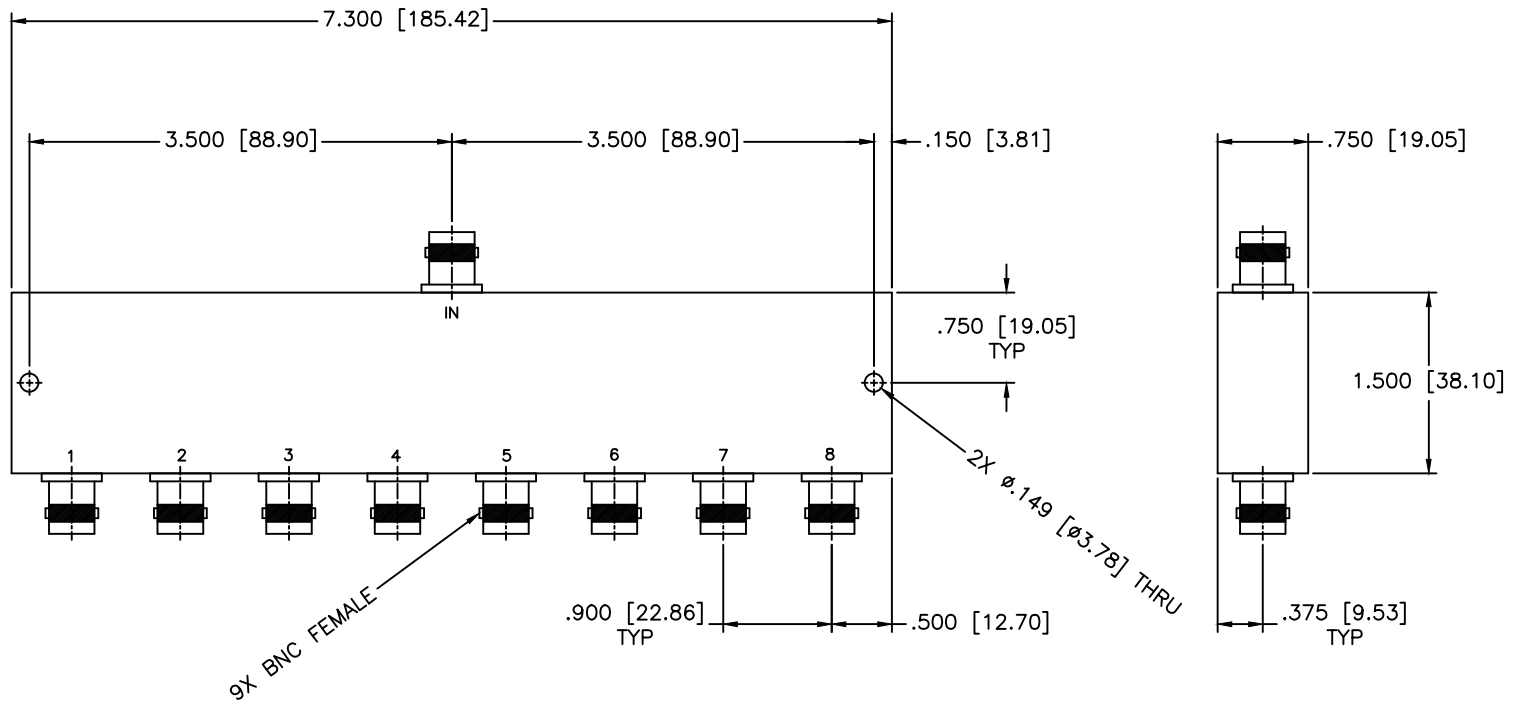

SPECIFICATIONS
 Frequency Range: 10–1000MHz
 Isolation: 14dB Min.
 Insertion Loss: 2.0dB Max.
 Amplitude Balance: ±0.9dB Max.
 Phase Balance: ±12 Deg. Max.
 VSWR: 1.30:1 Max.

MATERIAL	DRAWN: Pai boon Luethamhan	DATE: 04-01-2010	MCL MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8118 http://www.MCLI.COM	SCALE: N/A
				UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°
APPROVED: T. Nguyen	DATE: 04-01-2010	PART NO.: PL8-75/BF	CAGE CODE: OD2L5	SHEET: N/A
DO NOT SCALE THE DRAWING			SIZE: N/A	REV: A
DWG NO.: 81382			DO NOT SCALE THE DRAWING	