


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

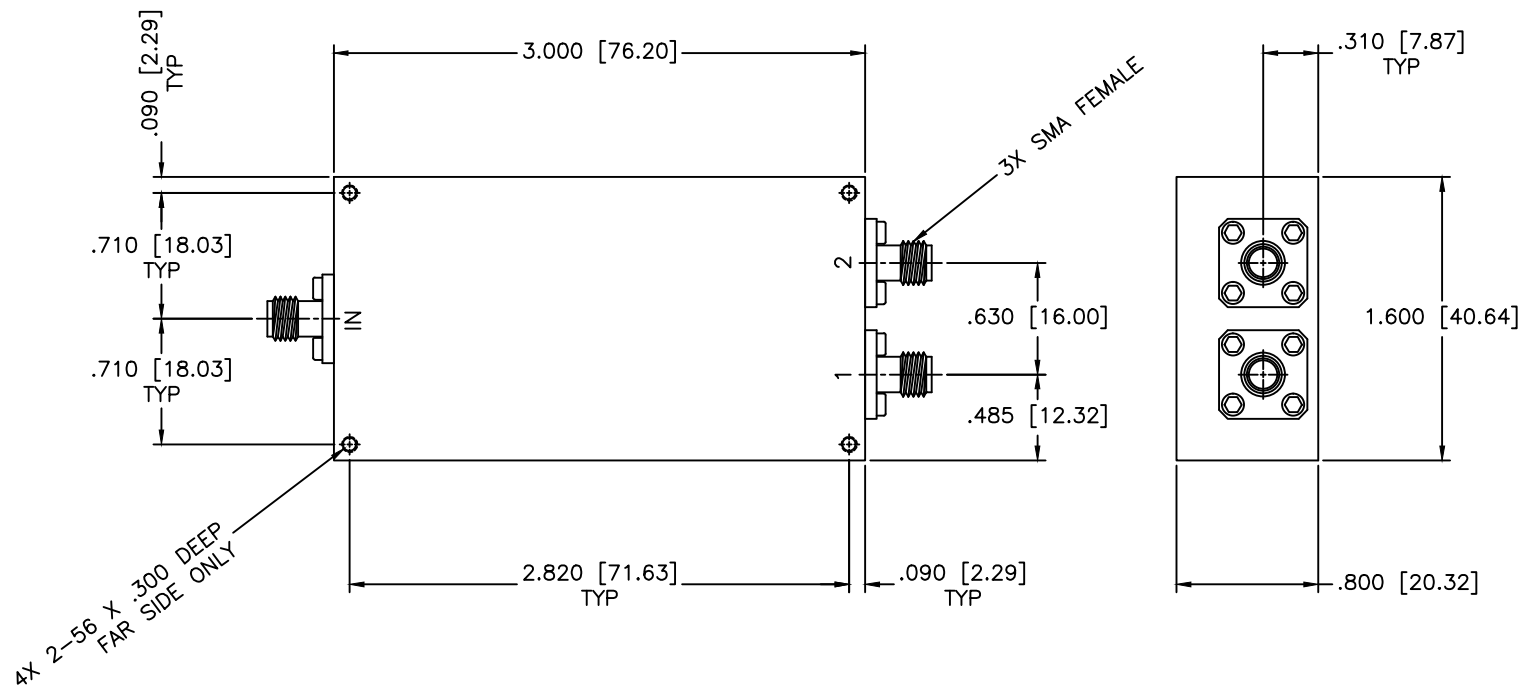

SPECIFICATIONS

- Frequency Range: 100–500 MHz
- Insertion Loss: 0.5dB Max.
- Isolation: 25dB Min.
- Phase Balance: ± 5 Deg. Max.
- Amplitude Balance: ± 0.25 dB Max.
- VSWR: 1.35:1 Max.
- Input Power: 50W CW

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-8118 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PLH2-10-50		
DATE: 02-01-2011		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 02-01-2011		SIZE: A REV: N/A DWG NO. 85299
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		