


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

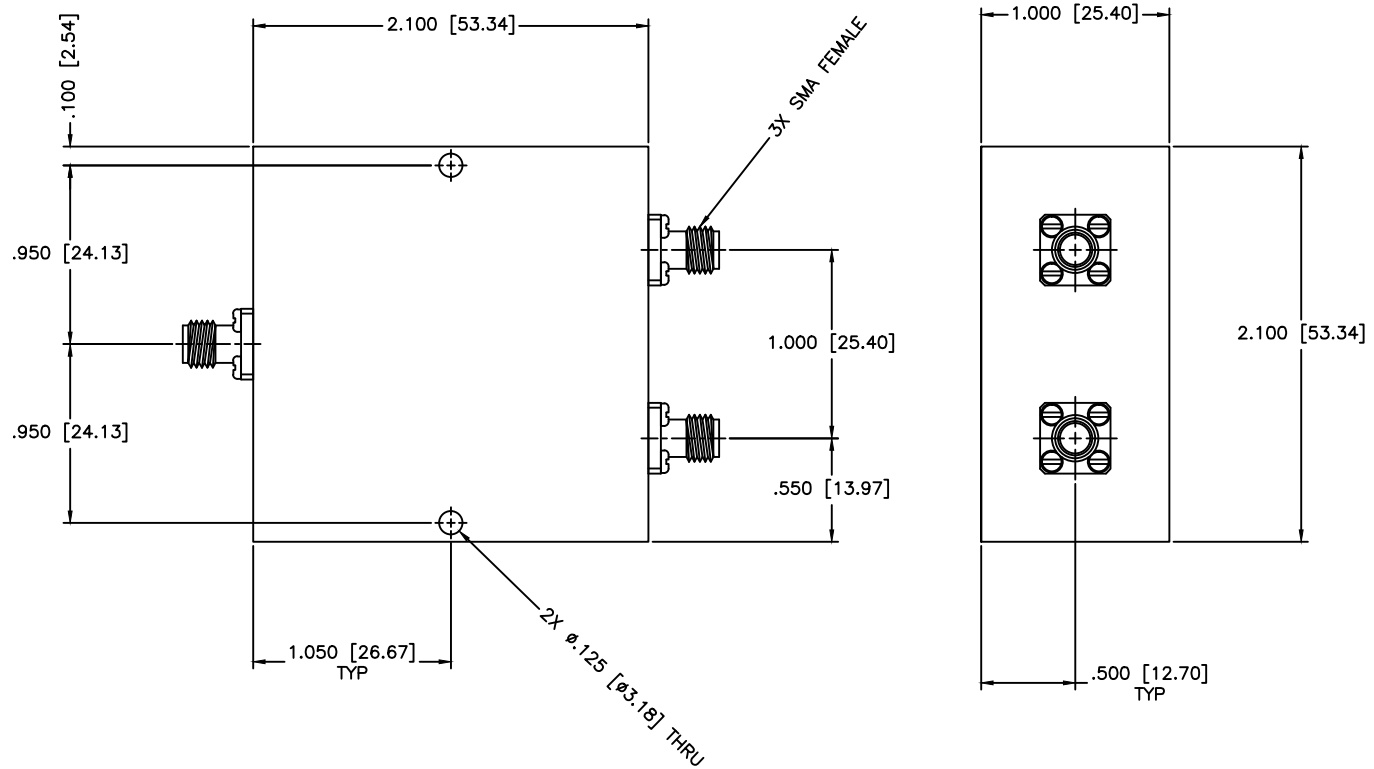

SPECIFICATIONS

- Frequency Range: 5–500 MHz
- Insertion Loss: 0.80dB Max.
- Isolation: 18dB Min.
- VSWR: 1.40:1 Max.
- Amplitude Balanced: ± 0.5 dB Max.
- Phase Balance: ± 5 Deg. Max.
- Power: 50 Watts Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDERS		
DRAWN: Paiboon Luekhamhan		PART NO. PLH2-20		
DATE: 10-15-2008		DWG. NO. 83948		
APPROVED: T. Nguyen		CAGE CODE: OD2L5		
DATE: 10-15-2008		SIZE: A		
THIRD ANGLE PROJECTION		REV: N/A		
		DO NOT SCALE THE DRAWING		